



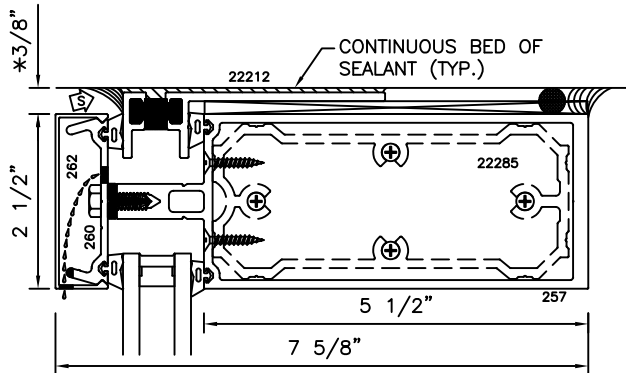


2-1/2" X 7-5/8" (5-1/2" B. M.) 250 C.W. EXTERIOR GLAZED CURTAIN WALL STANDARD / OPTIONAL DETAILS


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

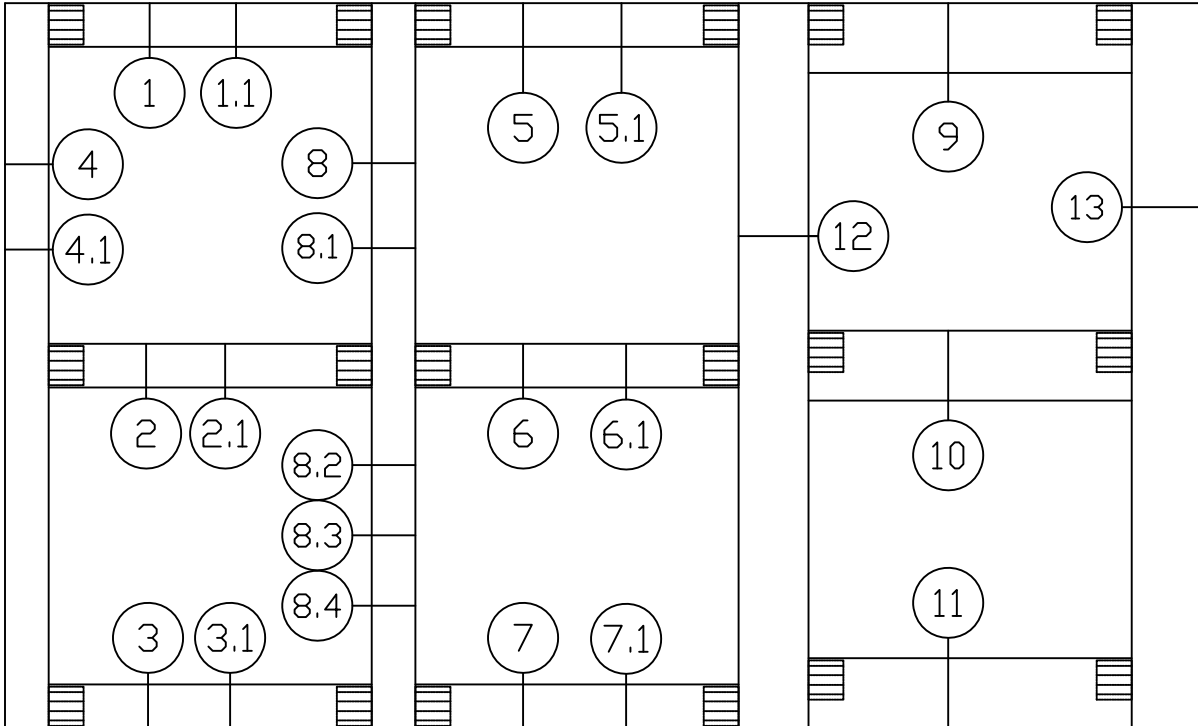


1

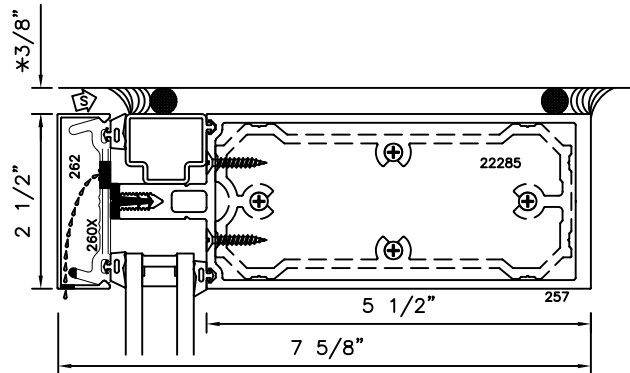

1.1

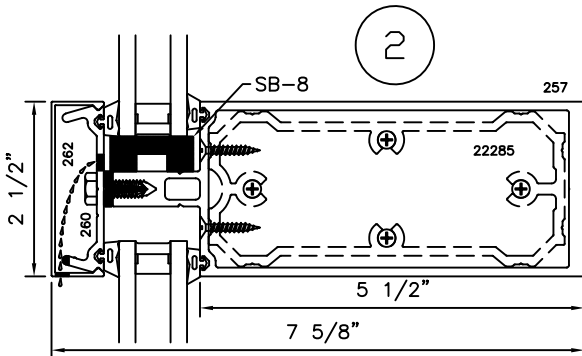

2

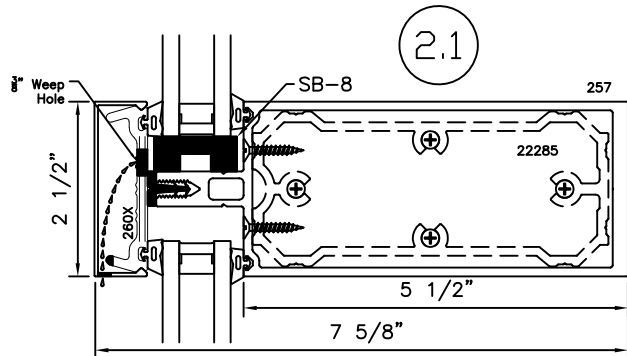


2.1




2-1/2" X 7-5/8" (5 1/2" B. M.) 250 C.W. EXTERIOR GLAZED CURTAIN WALL STANDARD / OPTIONAL DETAILS


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

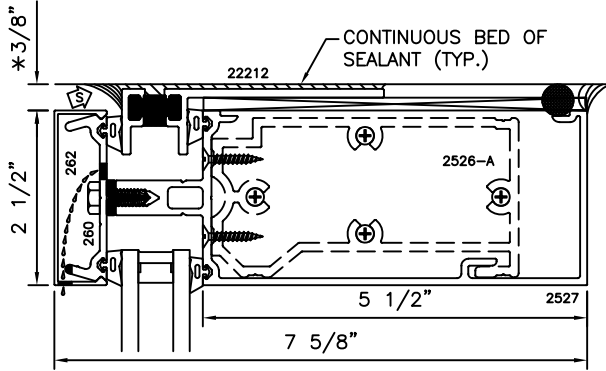


5

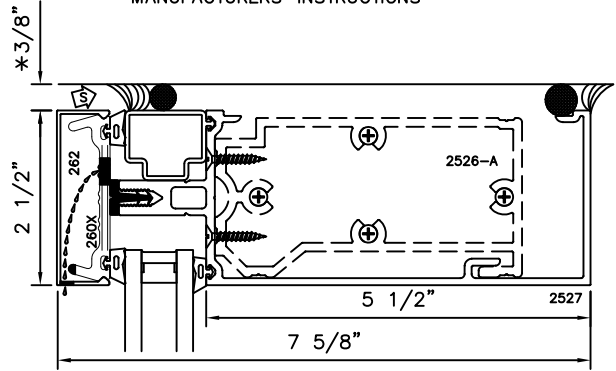


5.1

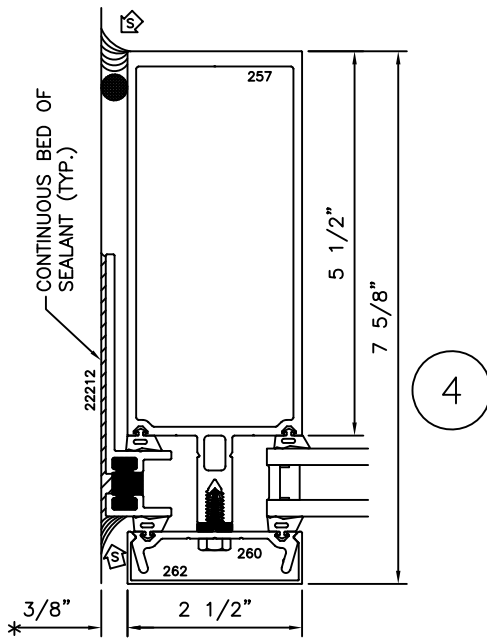


4

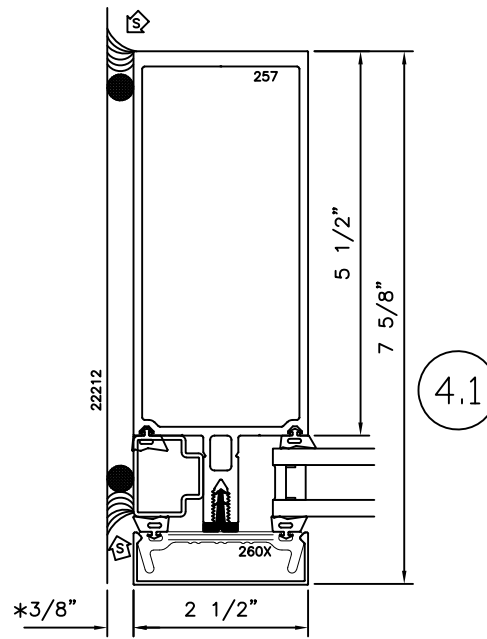

4.1

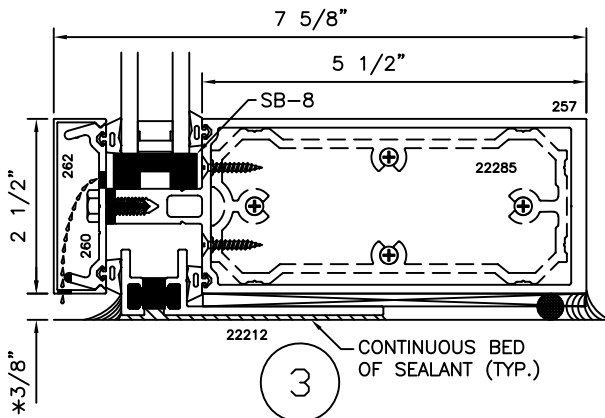

3

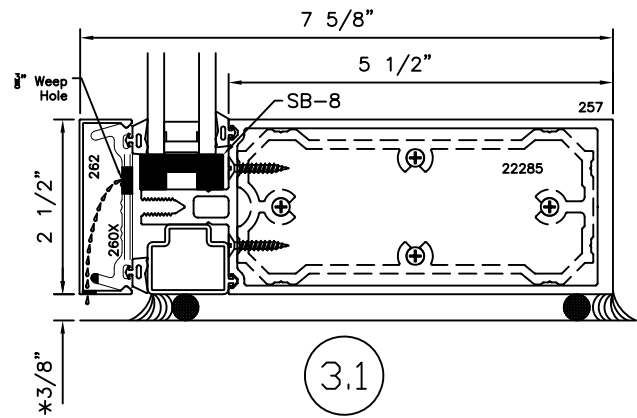


3.1




2-1/2" X 7-5/8" (5 1/2" B. M.) 250 C.W. EXTERIOR GLAZED CURTAIN WALL STANDARD / OPTIONAL DETAILS


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

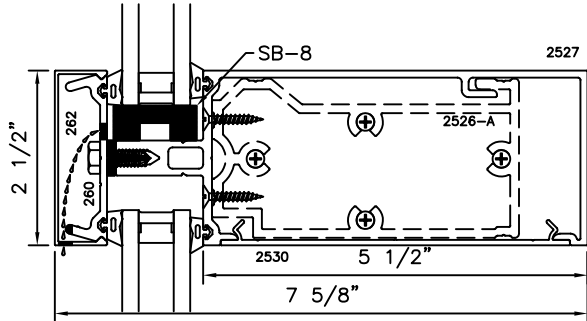


6

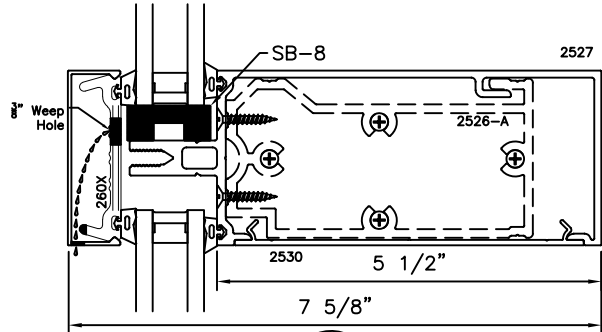


6.1

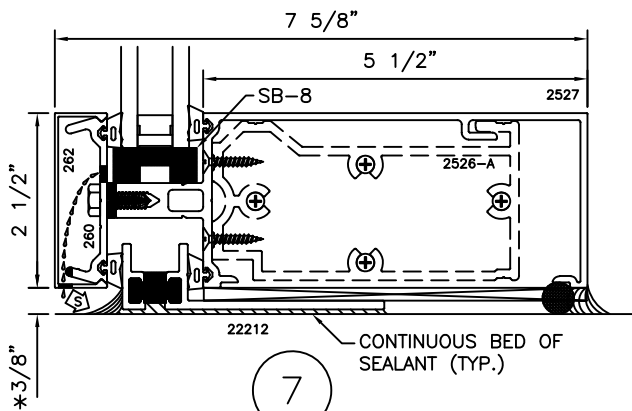


7

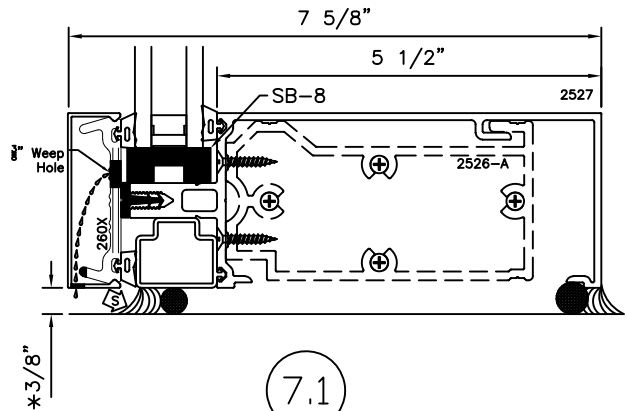

7.1

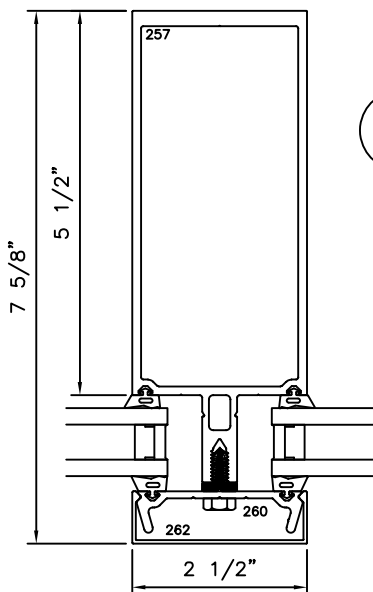


8

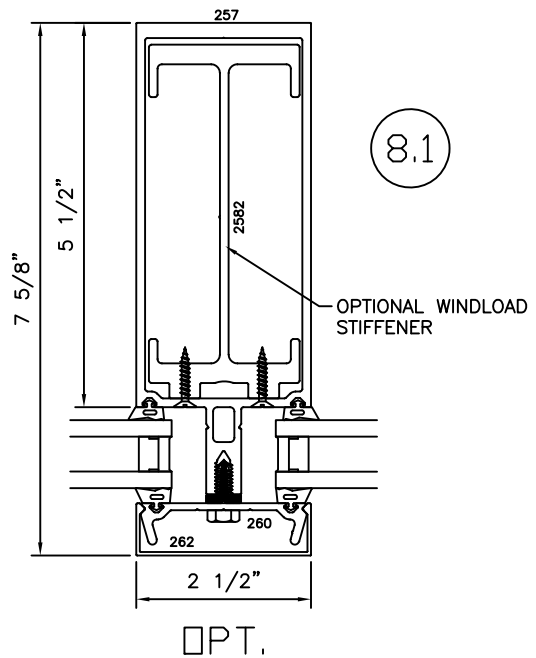


8.1




2-1/2" X 7-5/8" (5 1/2" B. M.)
250 C.W. EXTERIOR GLAZED CURTAIN WALL
 STANDARD / OPTIONAL DETAILS

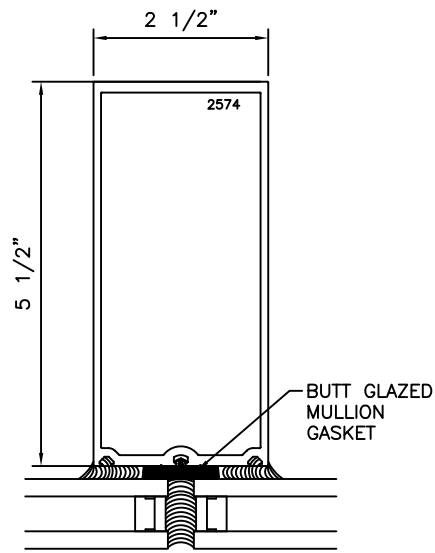


OPT.
 8.2

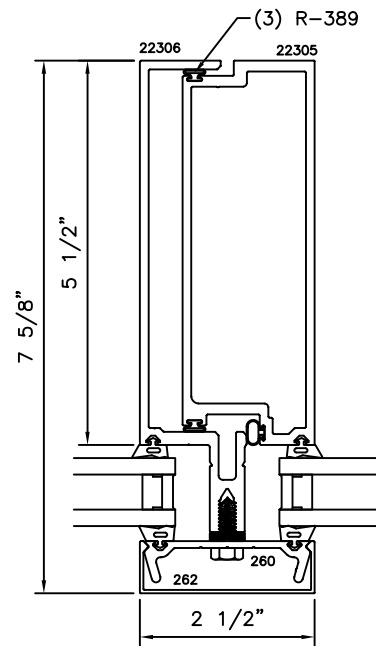

OPT.
 8.3

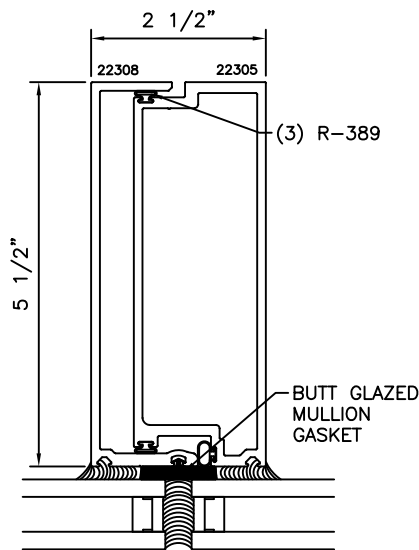

OPT.
 8.4

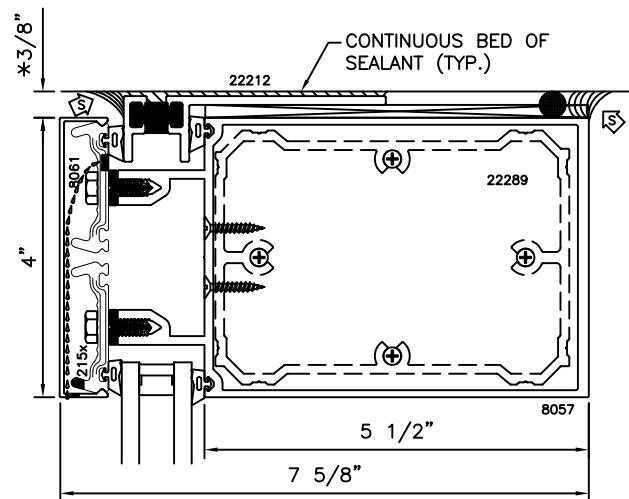


9




2-1/2" X 7-5/8" (5 1/2" B. M.) 250 C.W. EXTERIOR GLAZED CURTAIN WALL STANDARD / OPTIONAL DETAILS


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

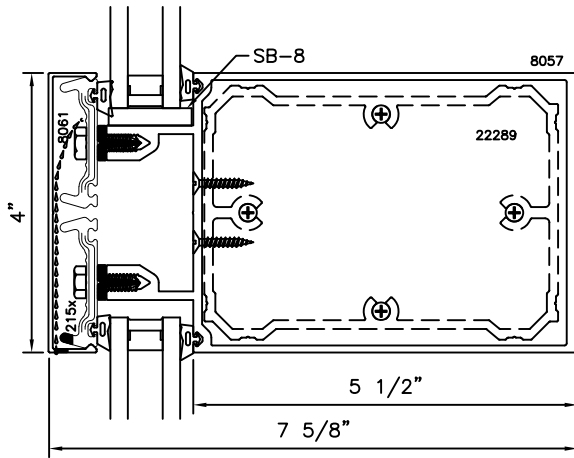


10

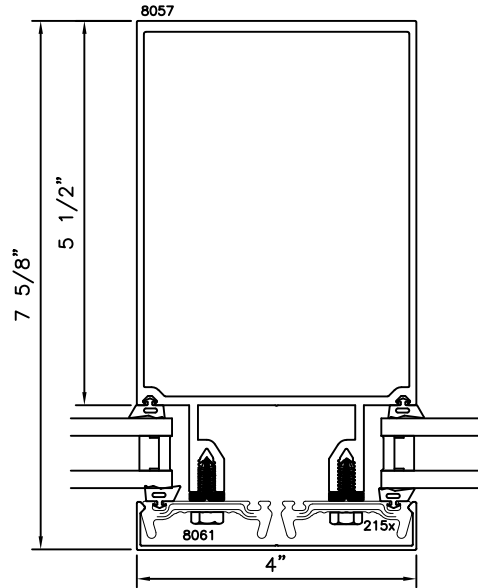

12

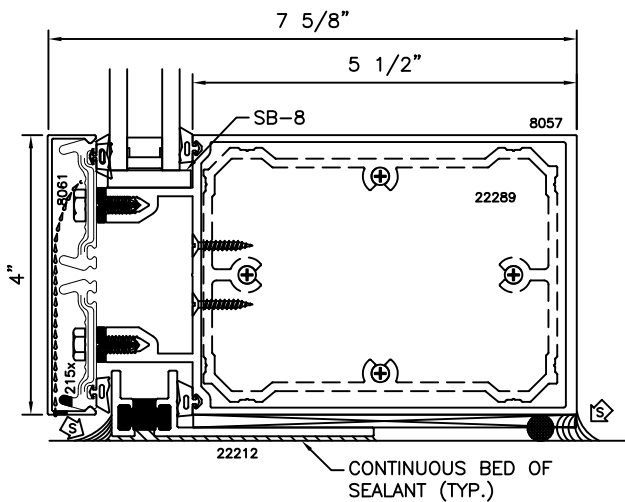

11

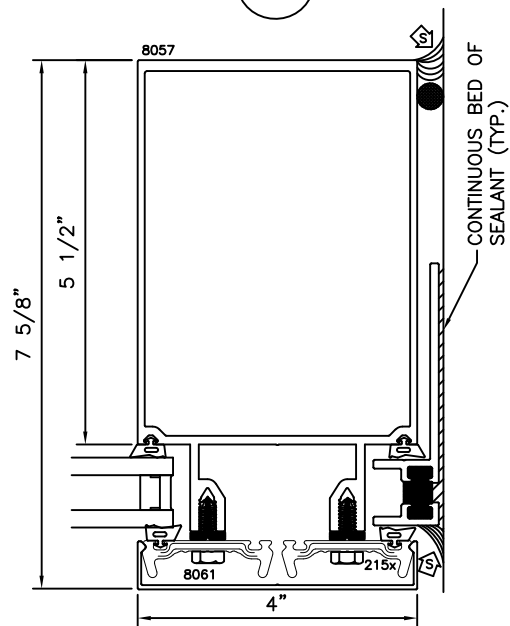

13