



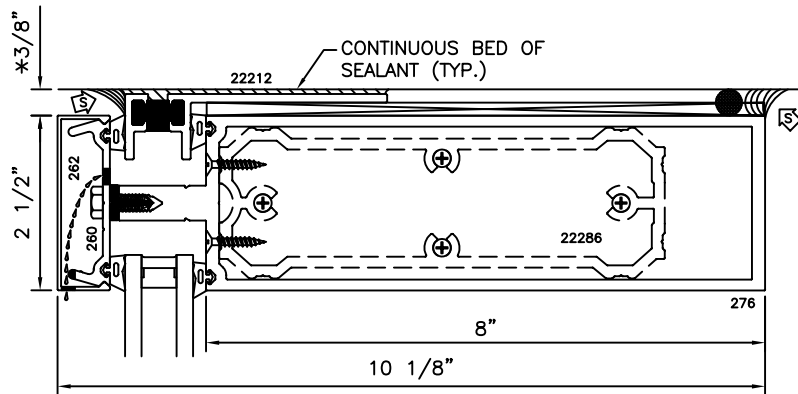


2-1/2" X 10-1/8" (8" B. M.) 250 C.W. EXTERIOR GLAZED CURTAIN WALL STANDARD / OPTIONAL DETAILS


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

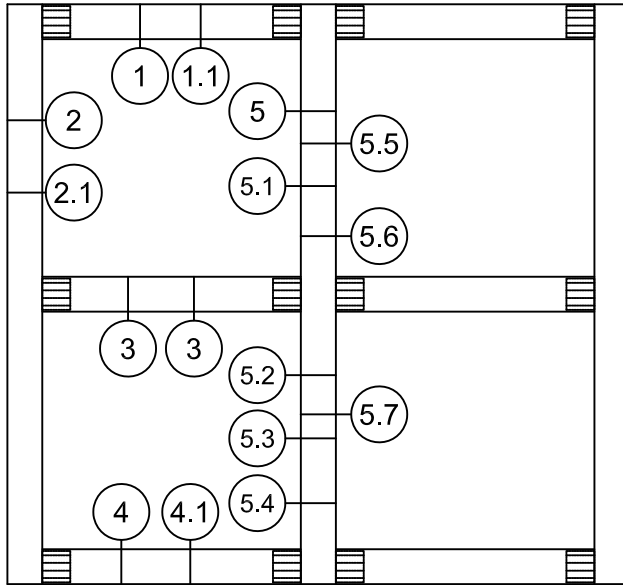

1

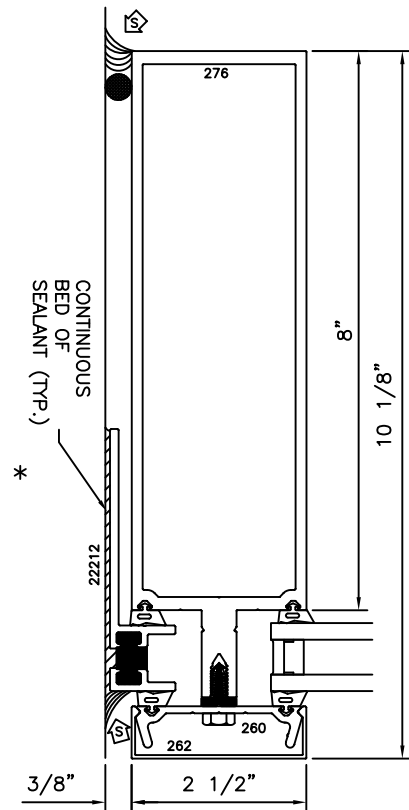

2

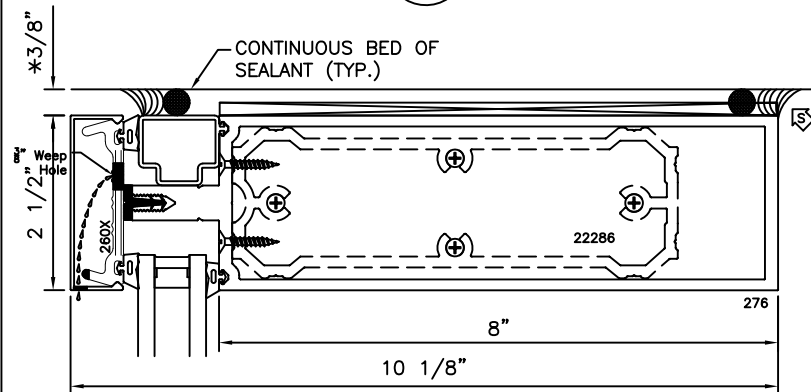


1.1



2-1/2" X 10-1/8" (8" B. M.) 250 C.W. EXTERIOR GLAZED CURTAIN WALL STANDARD / OPTIONAL DETAILS


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION. INCREASE AS REQUIRED TO COMPLY WITH SEALANT MANUFACTURERS' INSTRUCTIONS

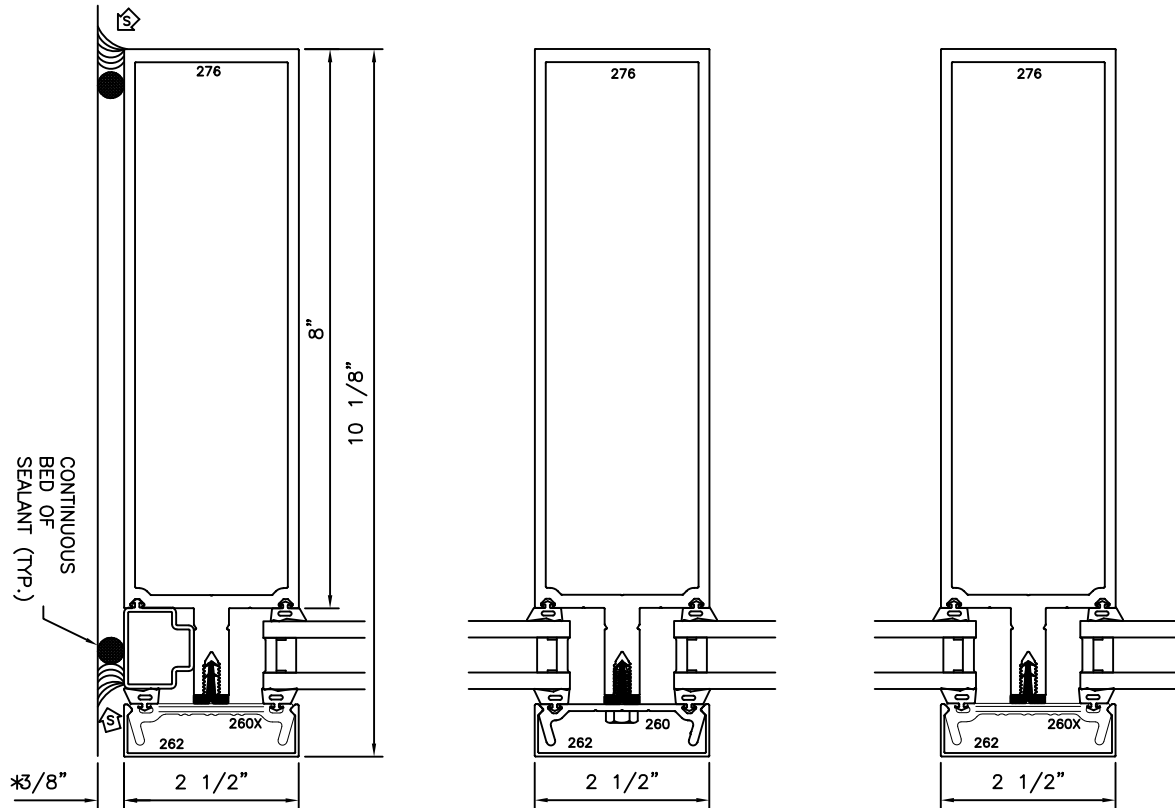


2.1

5

5.1

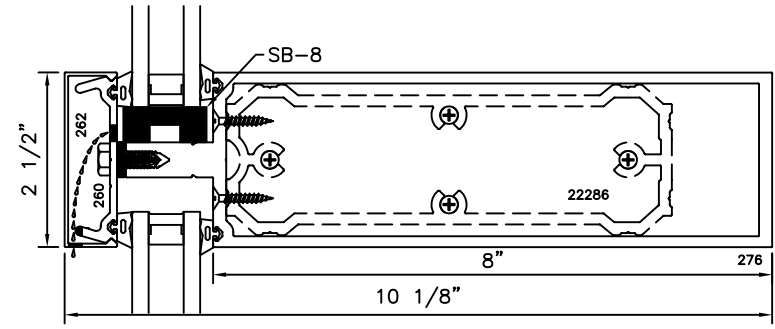



3

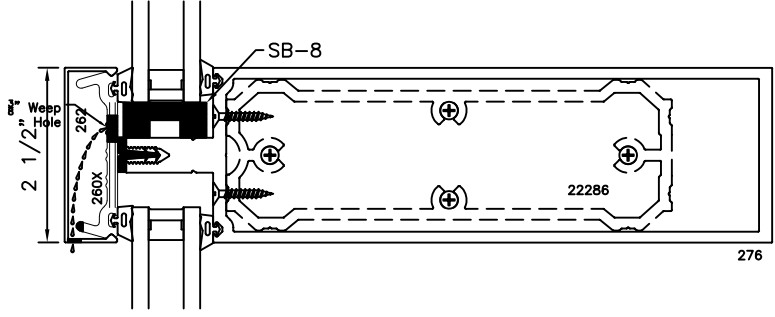

3.1



2-1/2" X 10-1/8" (8" B. M.)
250 C.W. EXTERIOR GLAZED CURTAIN WALL
 STANDARD / OPTIONAL DETAILS

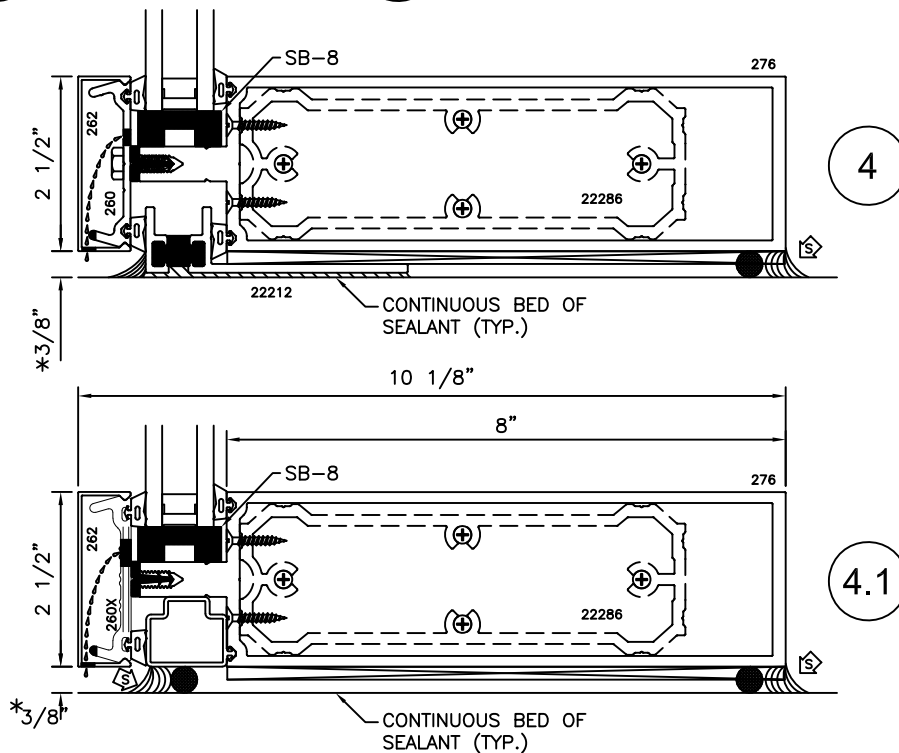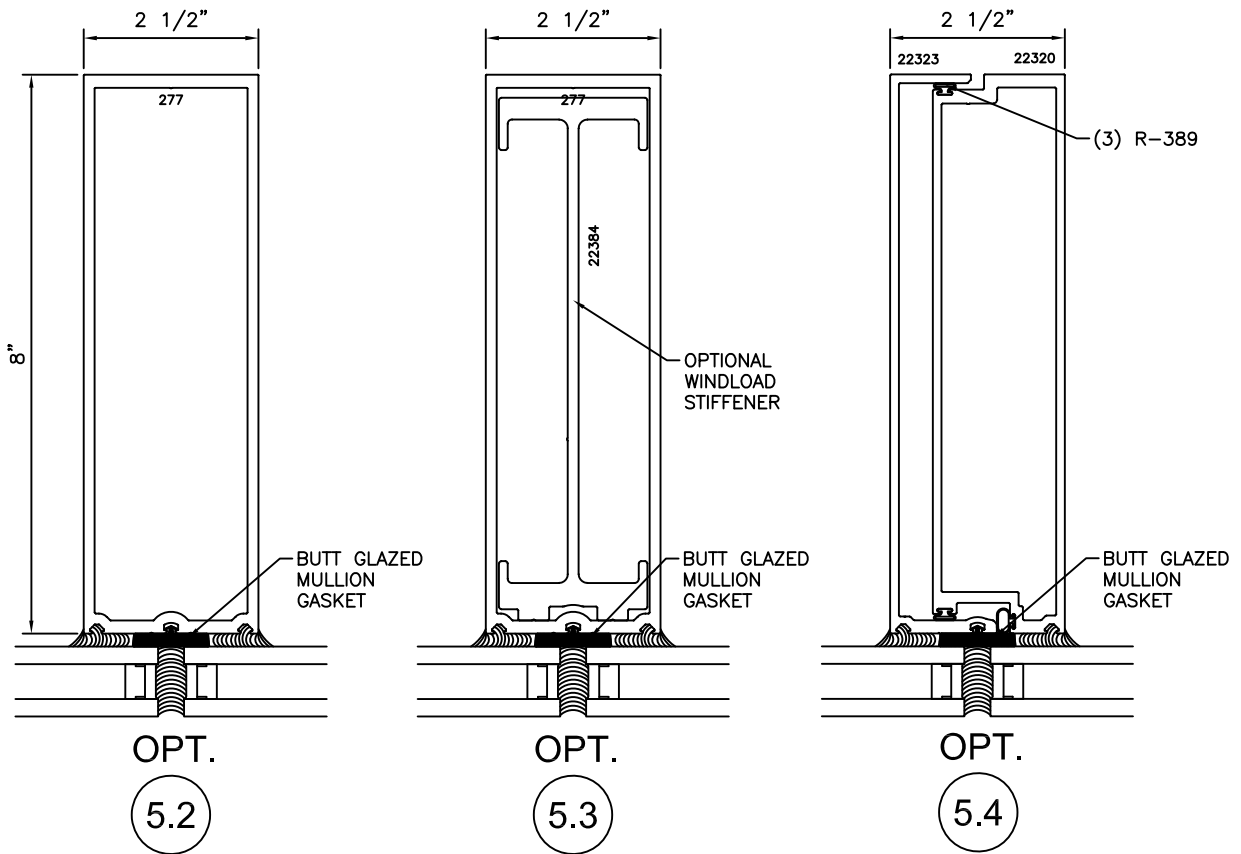



2-1/2" X 10-1/8" (8" B. M.)
250 C.W. EXTERIOR GLAZED CURTAIN WALL
STANDARD / OPTIONAL DETAILS

