





2450CG XPT


2" X 4 1/2" DOUBLE THERMALLY BROKEN STOREFRONT DOOR FRAME WITH 135 SERIES (MEDIUM STILE) DOOR STANDARD DETAILS

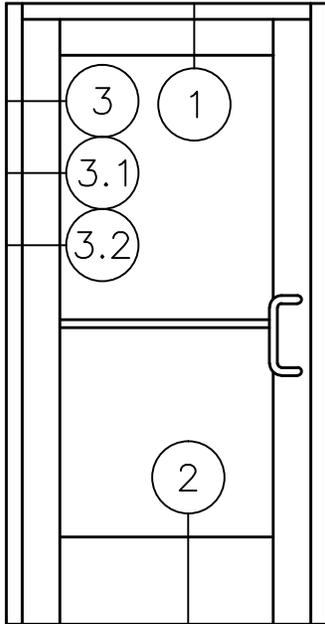


SINGLE DOOR
WITHOUT TRANSOM
STANDARD CONFIGURATION

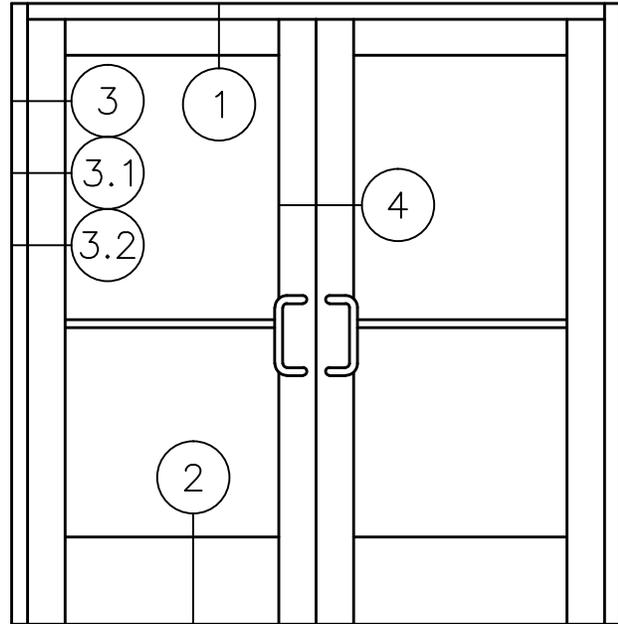

PAIR DOORS
WITHOUT TRANSOM
STANDARD CONFIGURATION

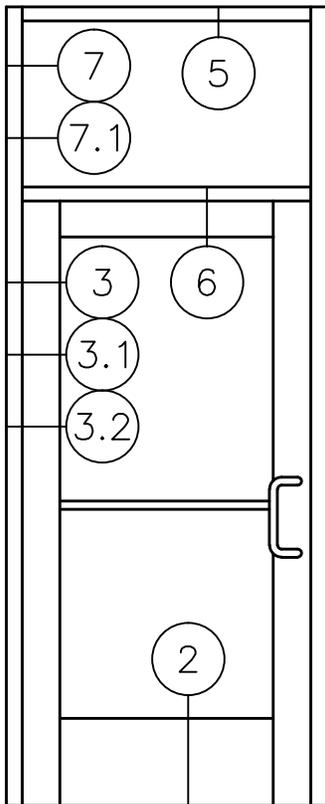

SINGLE DOOR
WITH TRANSOM
STANDARD CONFIGURATION

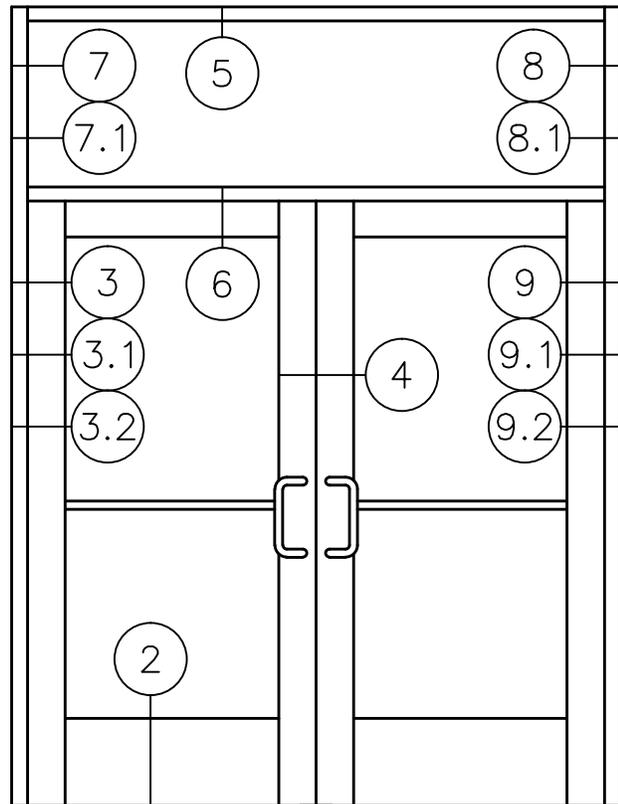


PAIR DOORS
WITH TRANSOM
STANDARD CONFIGURATION




2450CG XPT

2" X 4 1/2" DOUBLE THERMALLY BROKEN STOREFRONT DOOR FRAME WITH 135 SERIES (MEDIUM STILE) DOOR STANDARD DETAILS

* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

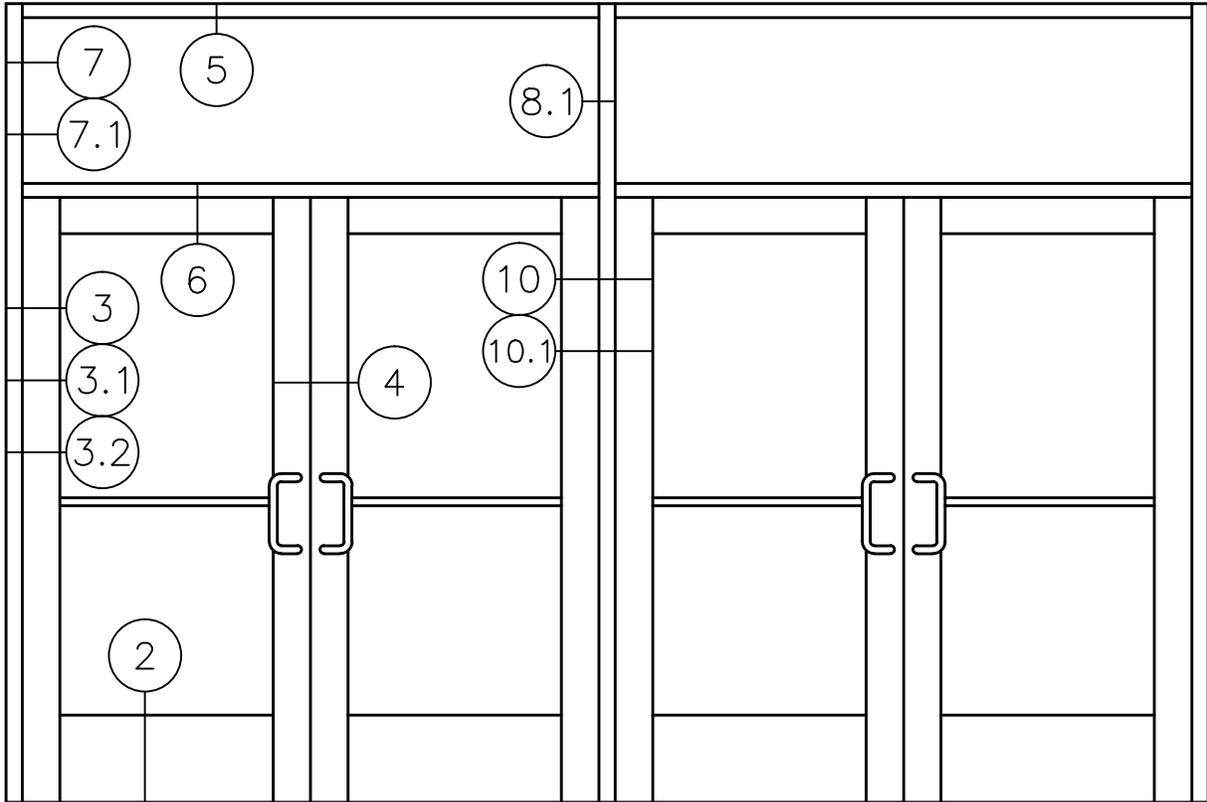

MULTIPLE PAIR DOORS MULLED TOGETHER
WITH TRANSOM STANDARD CONFIGURATION

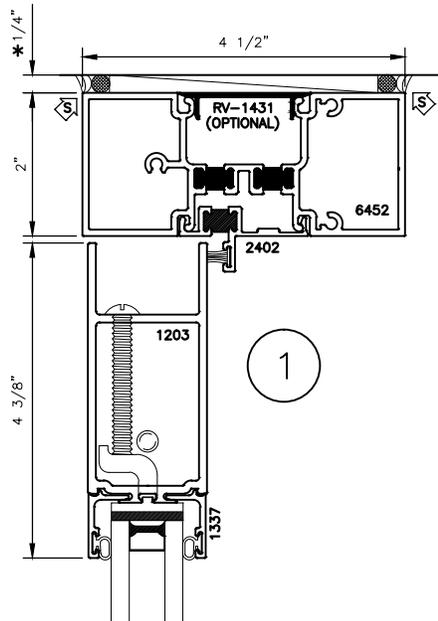





2450CG XPT

2" X 4 1/2" DOUBLE THERMALLY BROKEN STOREFRONT DOOR FRAME WITH 135 SERIES (MEDIUM STILE) DOOR STANDARD DETAILS


MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

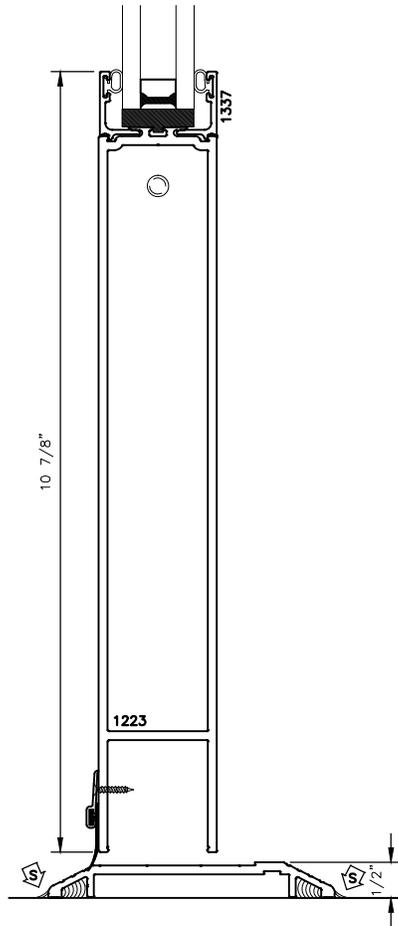


2

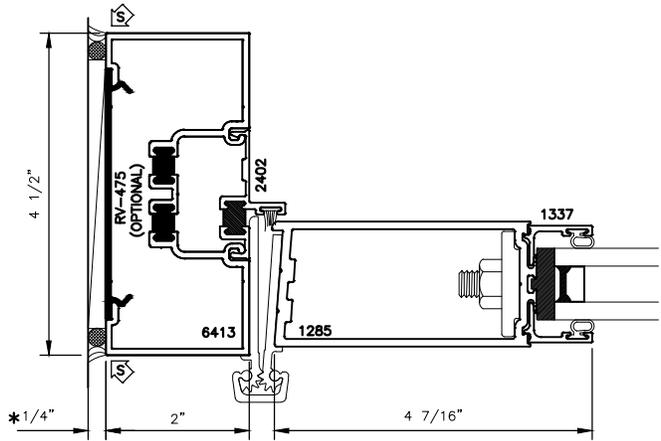

OPT.
3.1

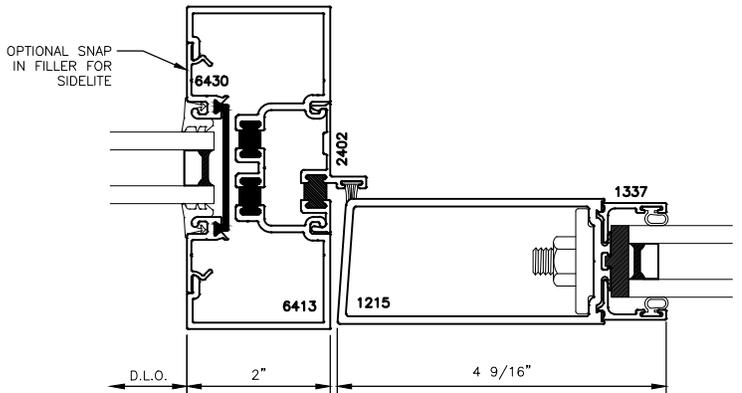

OPT.
3.2

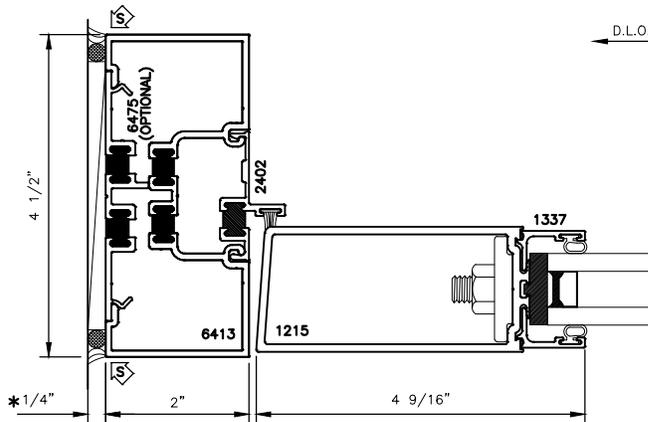

3


STANDARD SWEEP AND THRESHOLD SHOWN




2450CG XPT

2" X 4 1/2" DOUBLE THERMALLY BROKEN STOREFRONT DOOR FRAME WITH 135 SERIES (MEDIUM STILE) DOOR STANDARD DETAILS


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

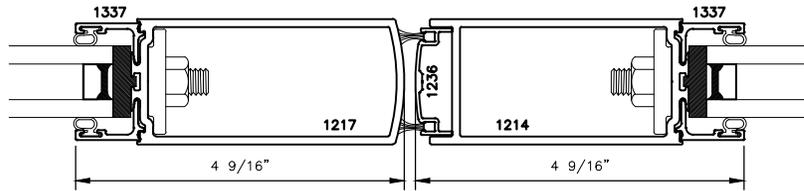


4

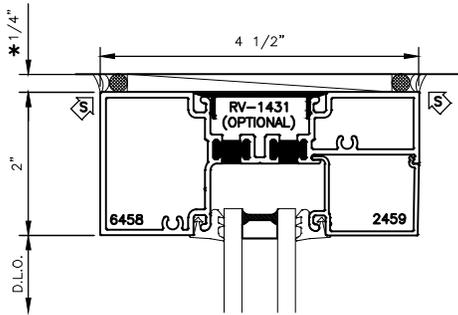


5

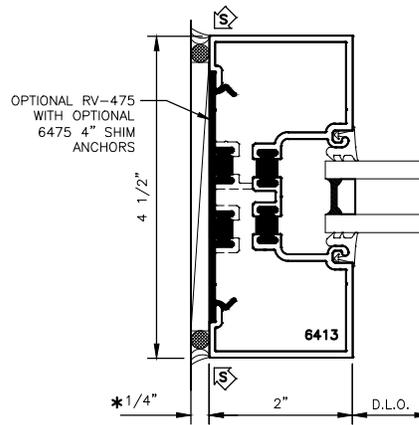

7

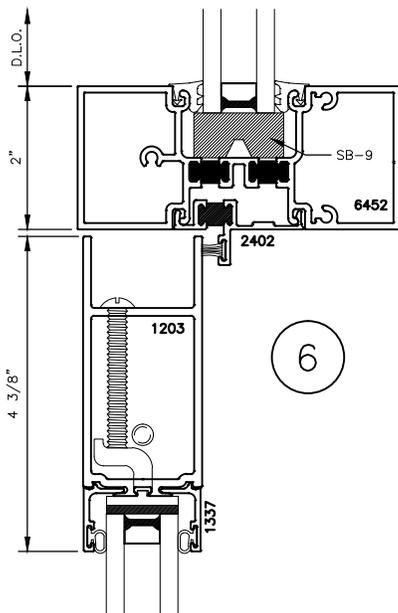

6

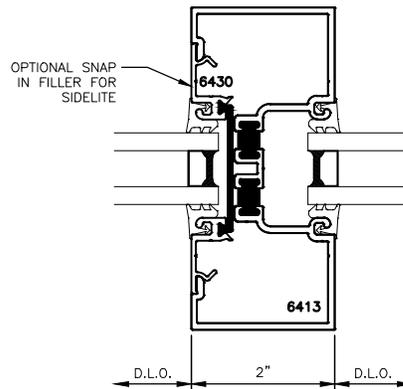


OPT.
7.1




2450CG XPT

2" X 4 1/2" DOUBLE THERMALLY BROKEN STOREFRONT DOOR FRAME WITH 135 SERIES (MEDIUM STILE) DOOR STANDARD DETAILS


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

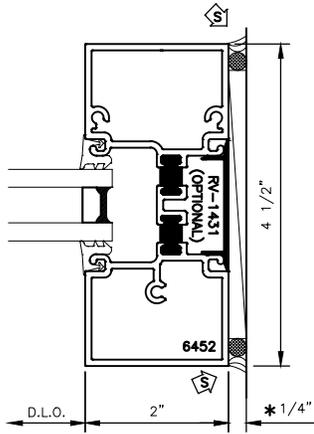


8

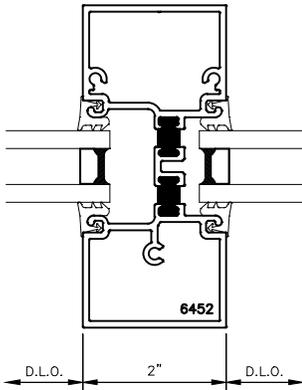


OPT.
8.1

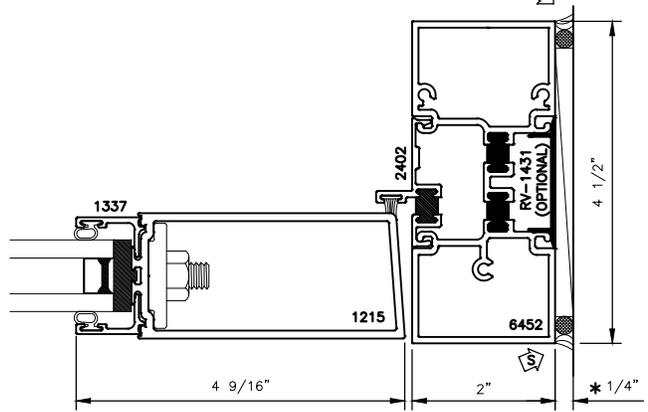

9

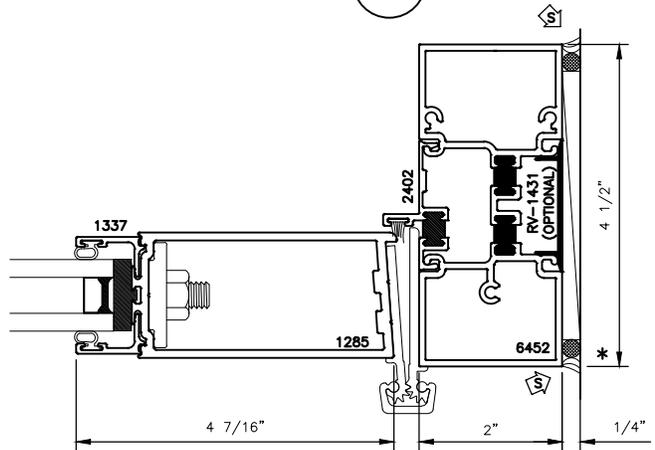

OPT.
9.1

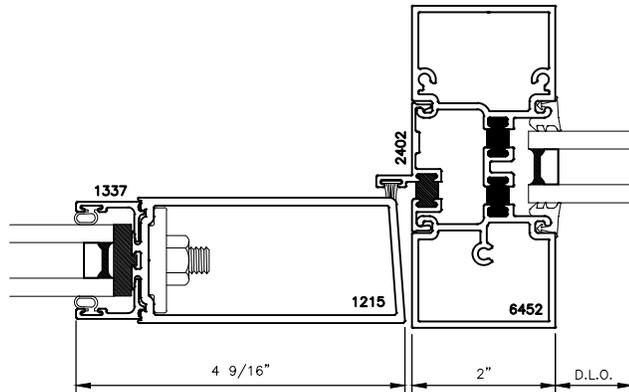


OPT.
9.2




2450CG XPT

2" X 4 1/2" DOUBLE THERMALLY BROKEN STOREFRONT DOOR FRAME WITH 135 SERIES (MEDIUM STILE) DOOR STANDARD DETAILS

* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

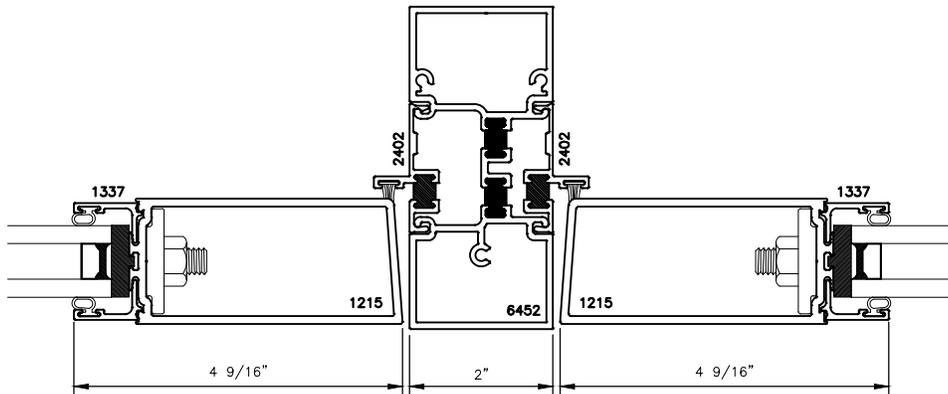

10

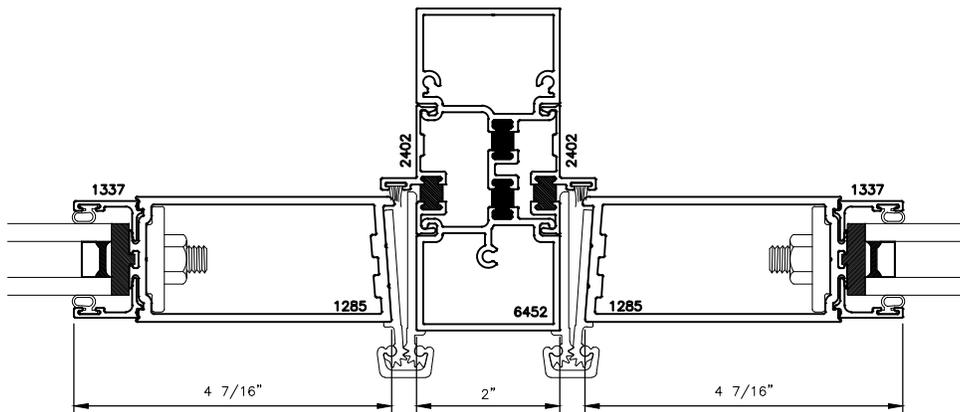

OPT.

10.1