





1450


2" X 4 1/2" STOREFRONT DOOR FRAMING
 WITH 135 SERIES (MEDIUM STILE)
 DOOR DETAILS - CENTER PIVOT &
 CONCEALED OVERHEAD CLOSER

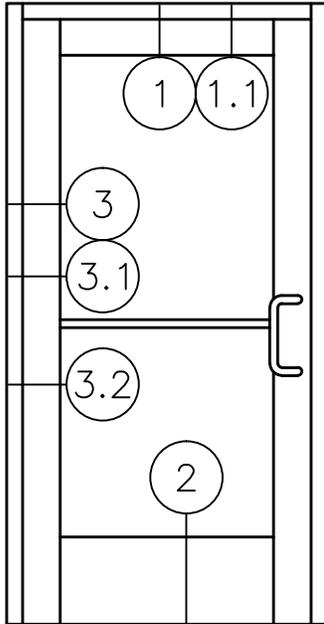


SINGLE DOOR
 WITHOUT TRANSOM
 STANDARD CONFIGURATION

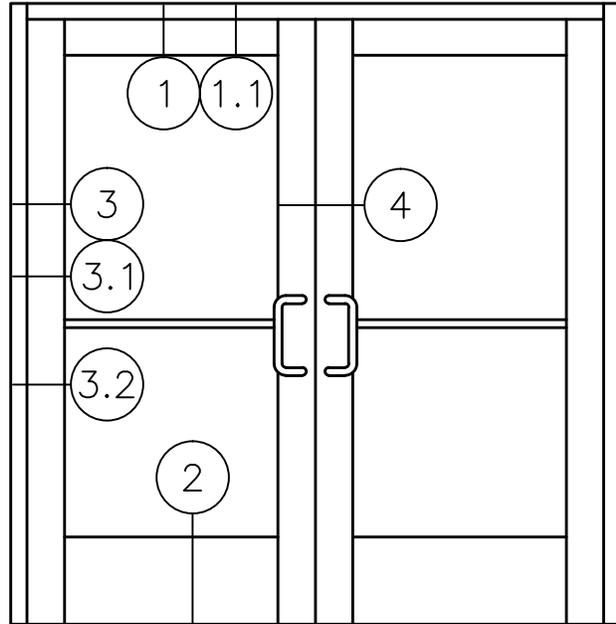

PAIR DOORS
 WITHOUT TRANSOM
 STANDARD CONFIGURATION

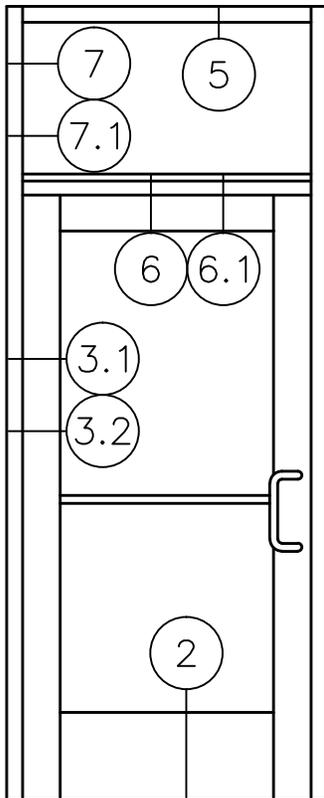

SINGLE DOOR
 WITH TRANSOM
 STANDARD CONFIGURATION

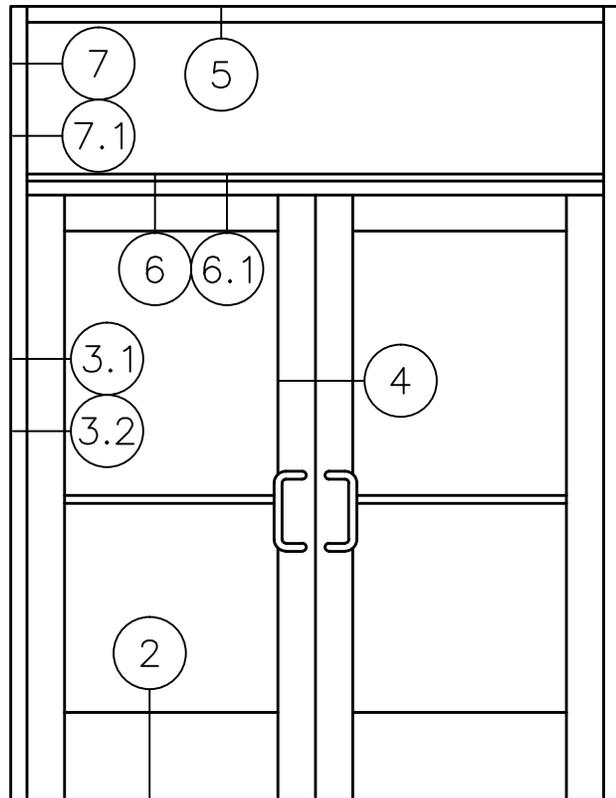





PAIR DOORS
 WITH TRANSOM
 STANDARD CONFIGURATION



1450

2" X 4 1/2" STOREFRONT DOOR FRAMING
 WITH 135 SERIES (MEDIUM STILE)
 DOOR DETAILS - CENTER PIVOT &
 CONCEALED OVERHEAD CLOSER

* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
 INCREASE AS REQUIRED TO COMPLY WITH SEALANT
 MANUFACTURERS' INSTRUCTIONS

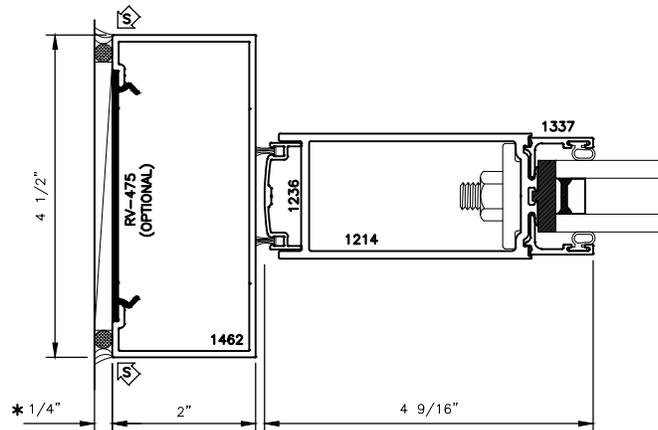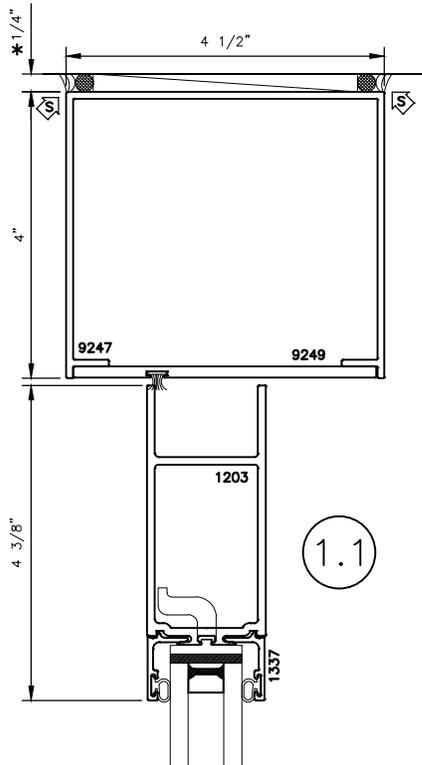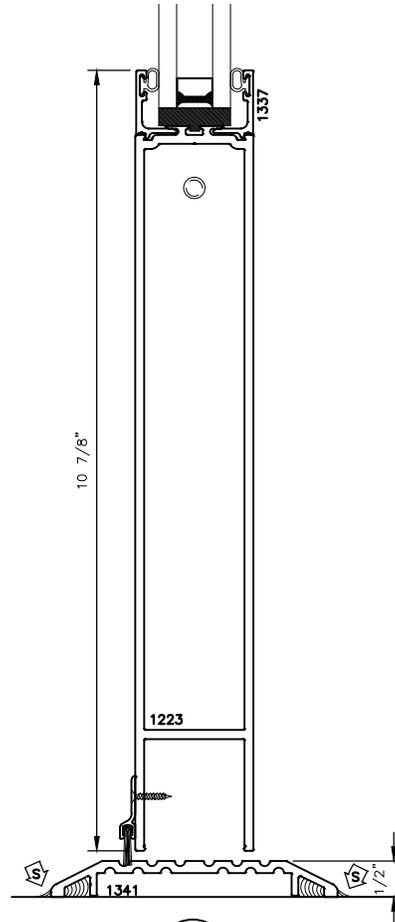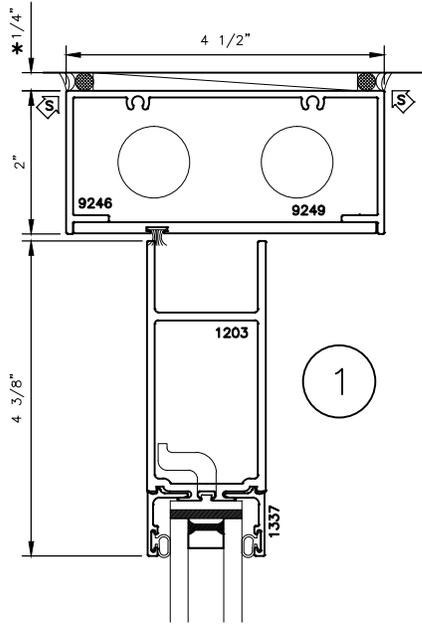


STANDARD SWEEP AND THRESHOLD SHOWN




1450

2" X 4 1/2" STOREFRONT DOOR FRAMING WITH 135 SERIES (MEDIUM STILE) DOOR DETAILS - CENTER PIVOT & CONCEALED OVERHEAD CLOSER


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

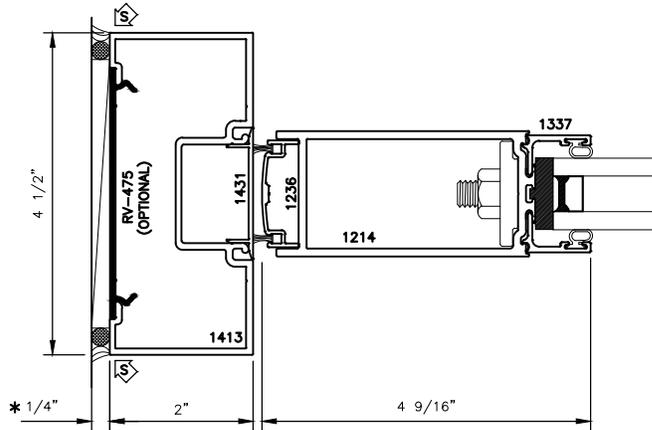


OPT.
3.1

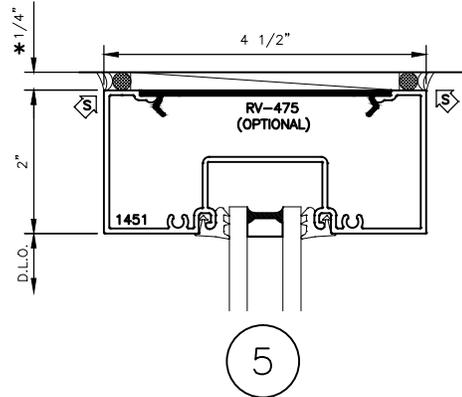


5

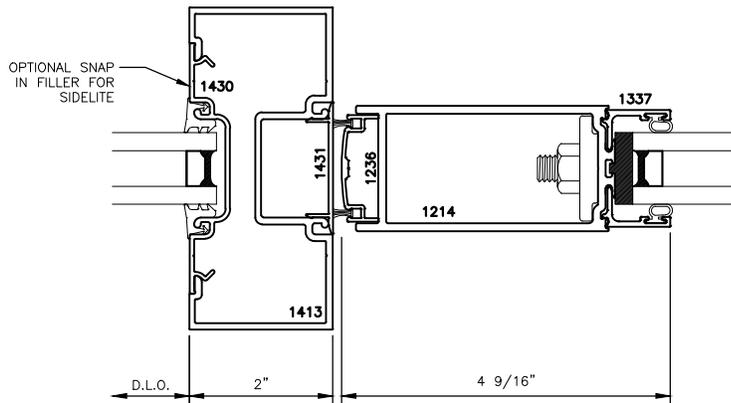

OPT.
3.2

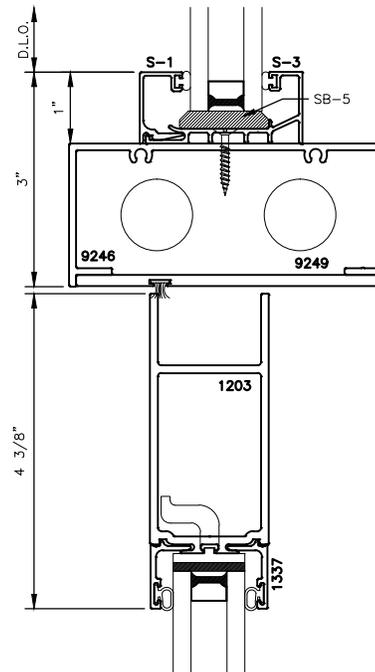

6

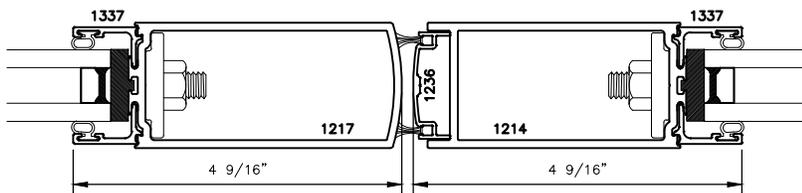


4




1450

2" X 4 1/2" STOREFRONT DOOR FRAMING WITH 135 SERIES (MEDIUM STILE) DOOR DETAILS - CENTER PIVOT & CONCEALED OVERHEAD CLOSER


* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.
INCREASE AS REQUIRED TO COMPLY WITH SEALANT
MANUFACTURERS' INSTRUCTIONS

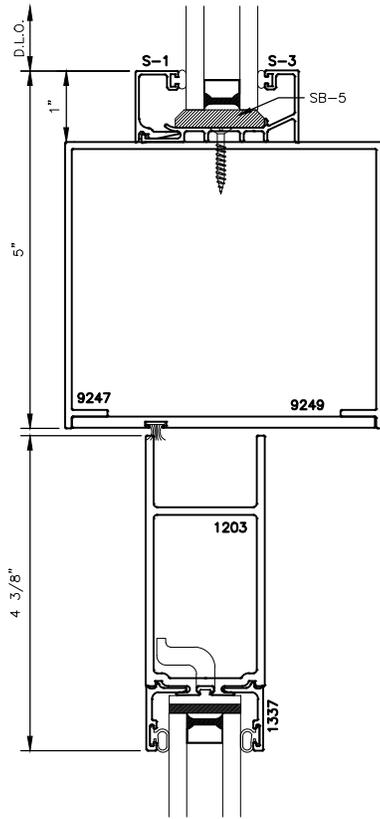

OPT.
6.1

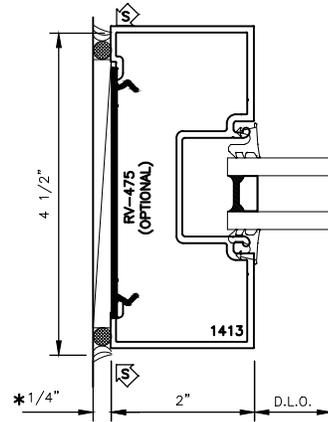

7

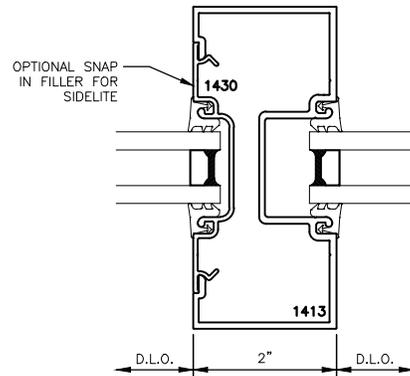

OPT.
7.1