




SINGLE DOOR  
WITHOUT TRANSOM  
STANDARD CONFIGURATION

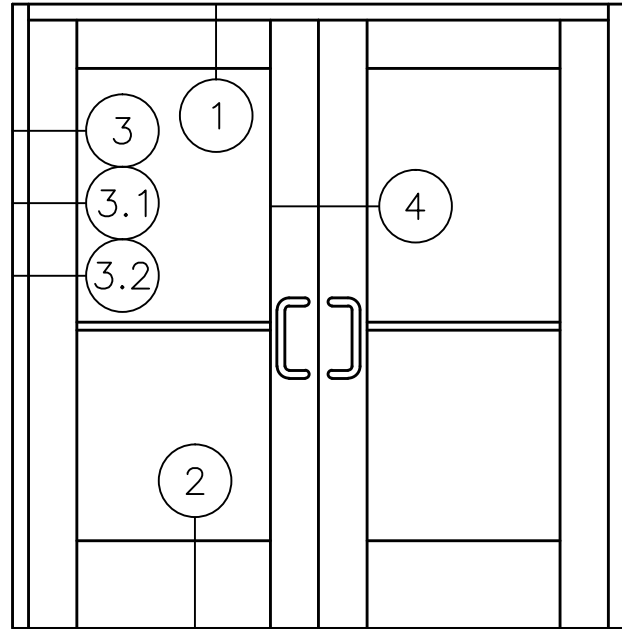

PAIR DOORS  
WITHOUT TRANSOM  
STANDARD CONFIGURATION

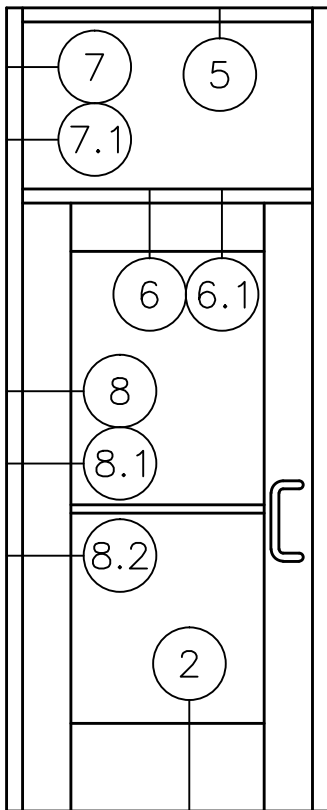


SINGLE DOOR  
WITH TRANSOM  
STANDARD CONFIGURATION

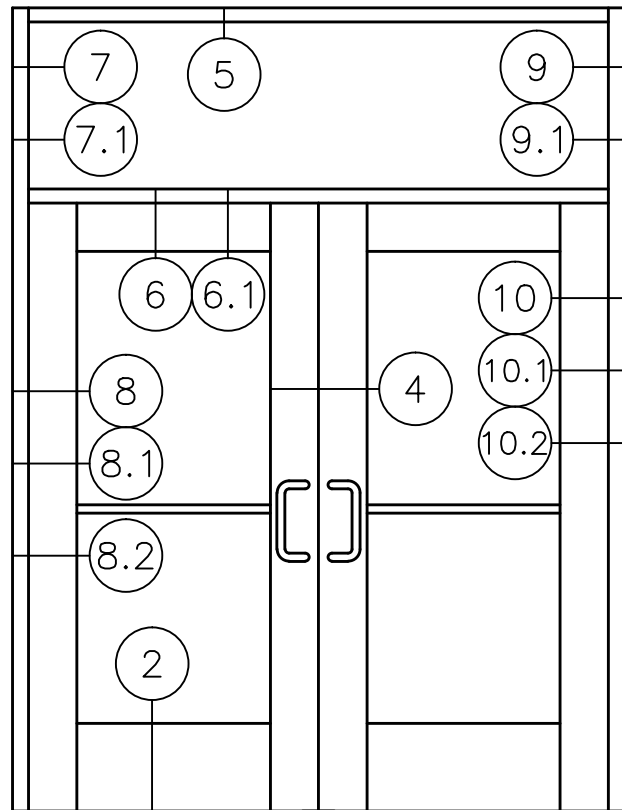


PAIR DOORS  
WITH TRANSOM  
STANDARD CONFIGURATION

\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.  
INCREASE AS REQUIRED TO COMPLY WITH SEALANT  
MANUFACTURERS' INSTRUCTIONS

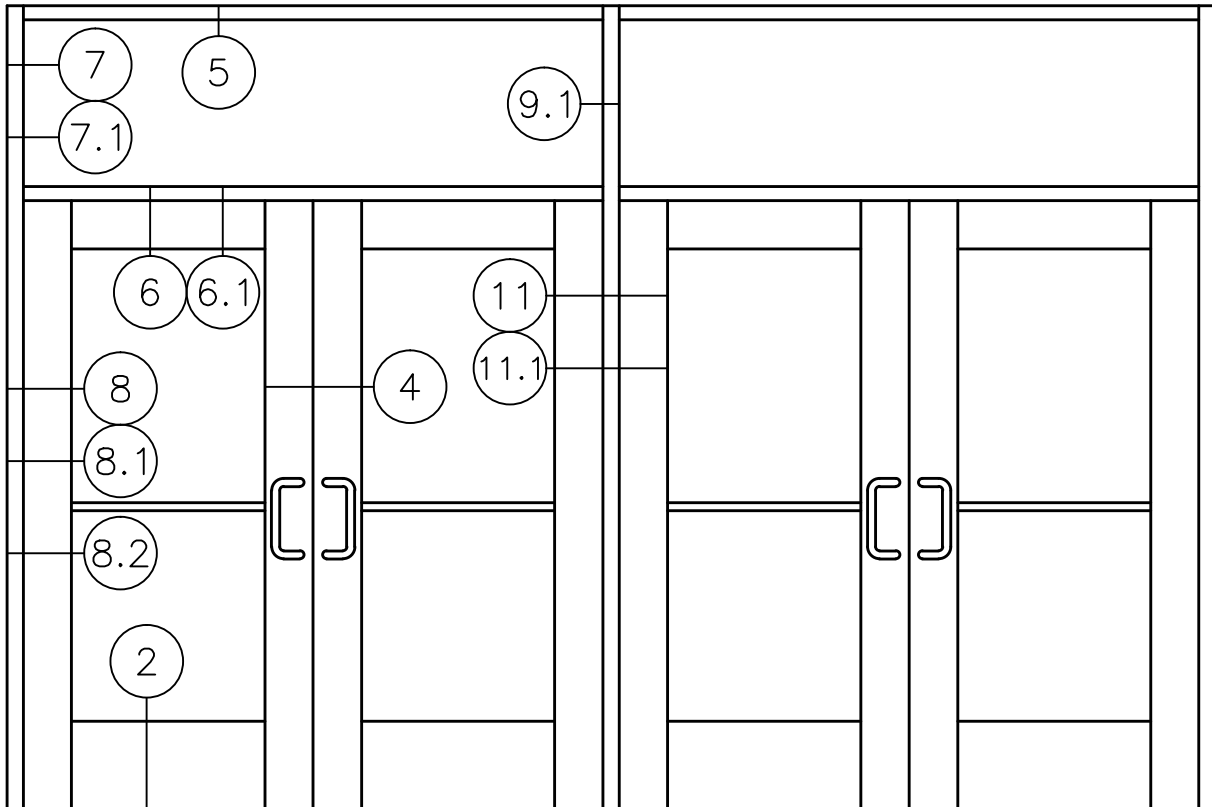

MULTIPLE PAIR DOORS MULLED TOGETHER  
WITH TRANSOM STANDARD CONFIGURATION

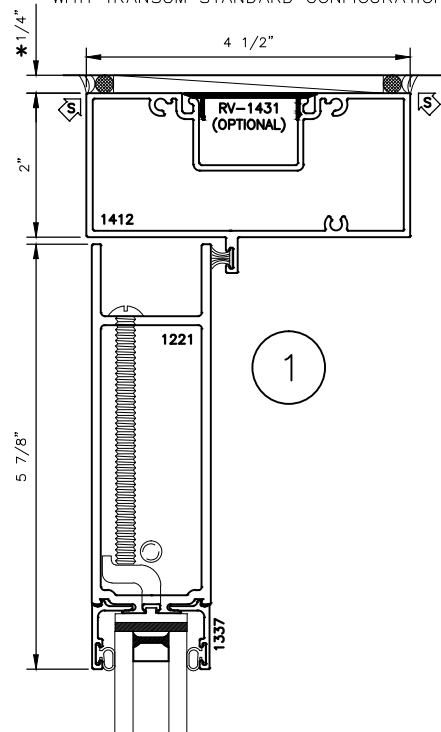





# 1450

## 2" X 4 1/2" NON-THERMAL STOREFRONT DOOR FRAME WITH 150 SERIES (WIDE STILE) DOOR STANDARD DETAILS


\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.  
INCREASE AS REQUIRED TO COMPLY WITH SEALANT  
MANUFACTURERS' INSTRUCTIONS

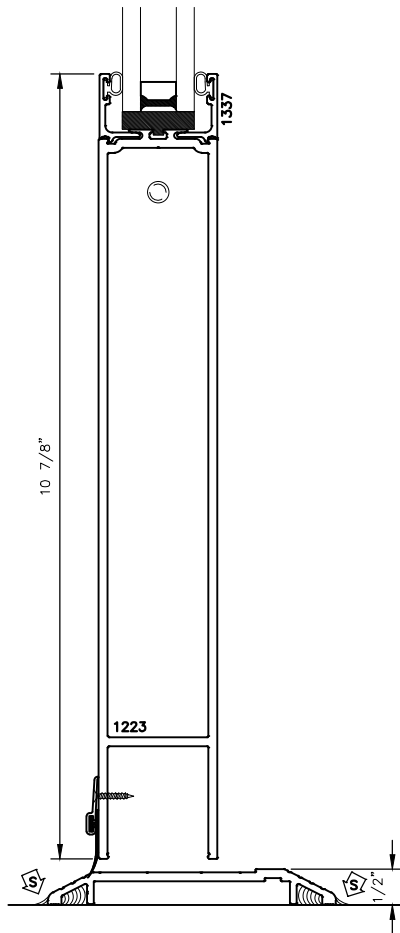


2

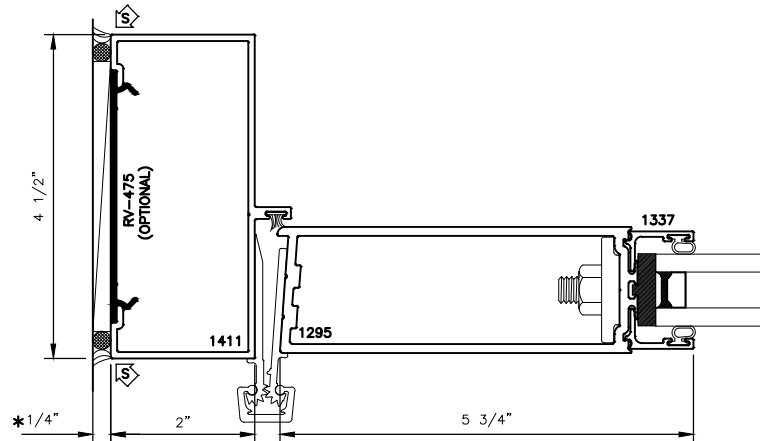

OPT.  
3.1

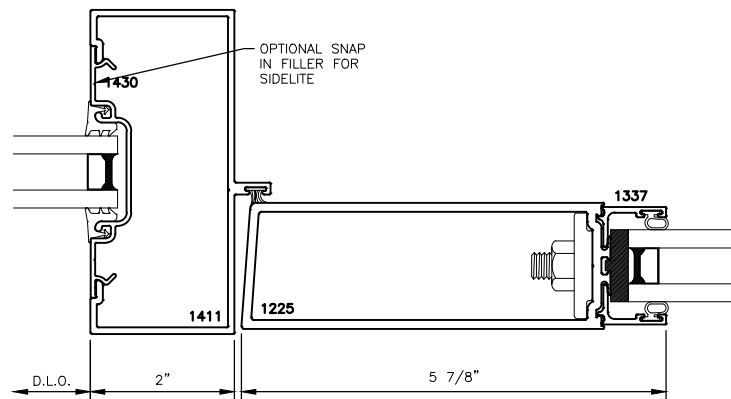

OPT.  
3.2

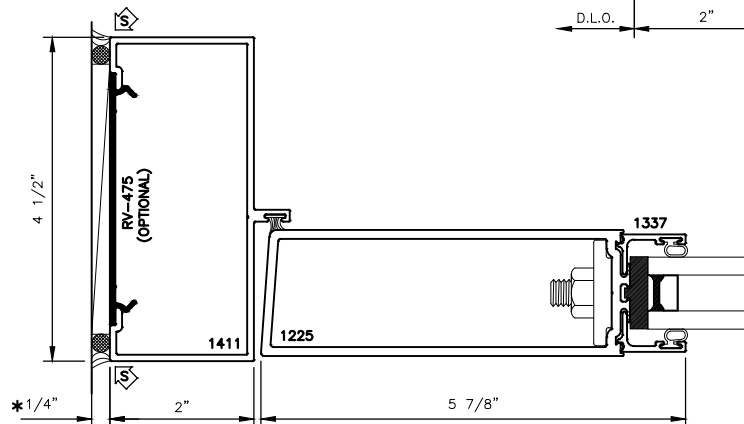

3


STANDARD SWEEP AND THRESHOLD SHOWN




1450

# 2" X 4 1/2" NON-THERMAL STOREFRONT DOOR FRAME WITH 150 SERIES (WIDE STILE) DOOR STANDARD DETAILS


\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.  
INCREASE AS REQUIRED TO COMPLY WITH SEALANT  
MANUFACTURERS' INSTRUCTIONS

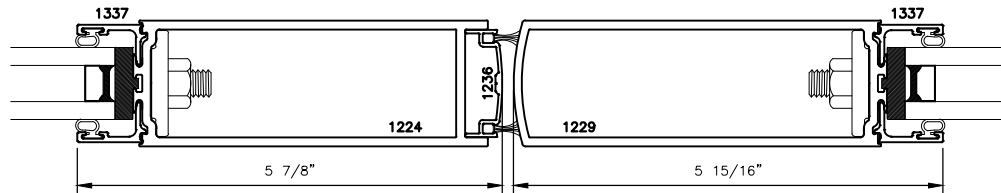


4

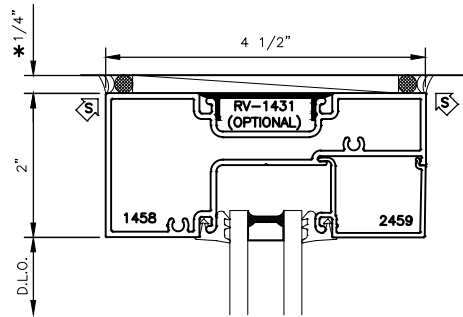

5

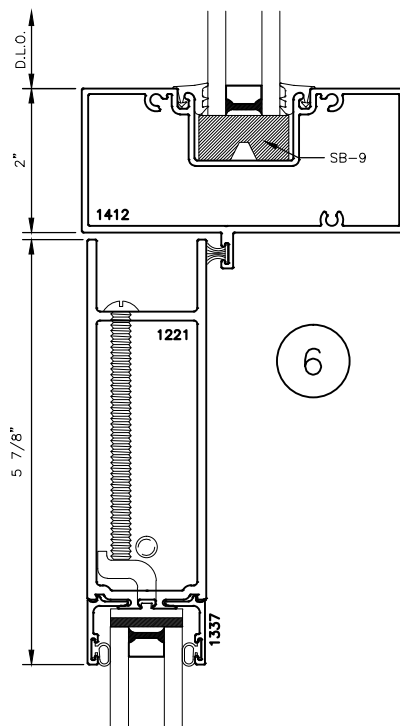

6

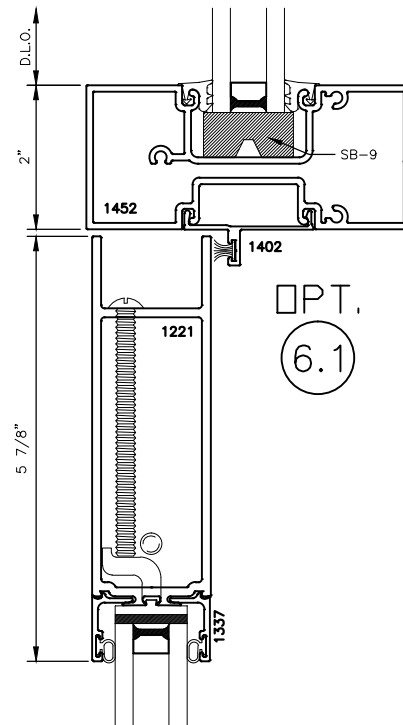





# 1450

## 2" X 4 1/2" NON-THERMAL STOREFRONT DOOR FRAME WITH 150 SERIES (WIDE STILE) DOOR STANDARD DETAILS


\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.  
INCREASE AS REQUIRED TO COMPLY WITH SEALANT  
MANUFACTURERS' INSTRUCTIONS

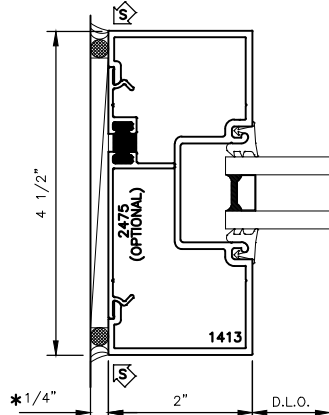


7

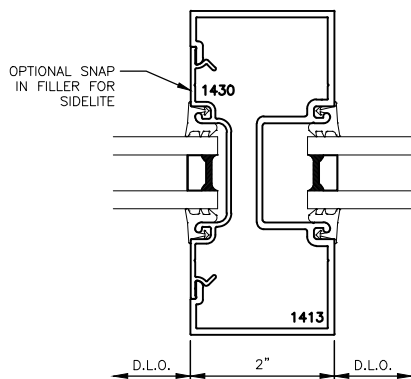


OPT.  
7.1

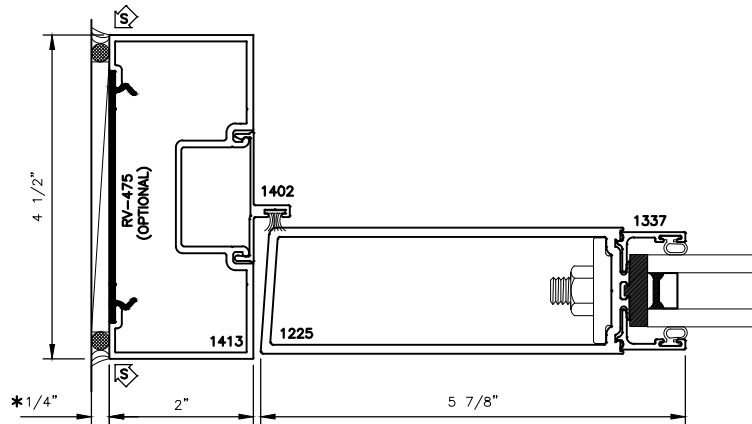

8

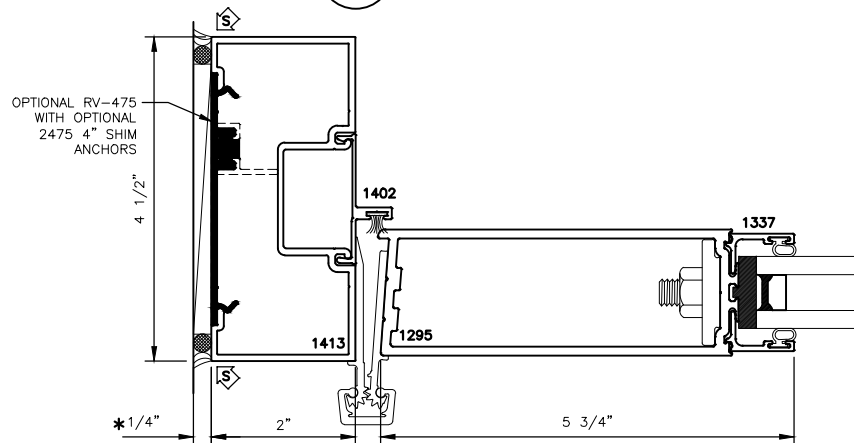


OPT.  
8.1

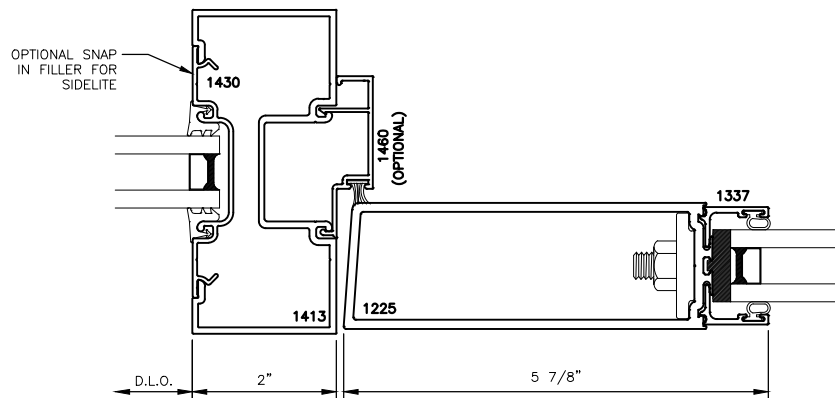


OPT.  
8.2


\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.  
INCREASE AS REQUIRED TO COMPLY WITH SEALANT  
MANUFACTURERS' INSTRUCTIONS

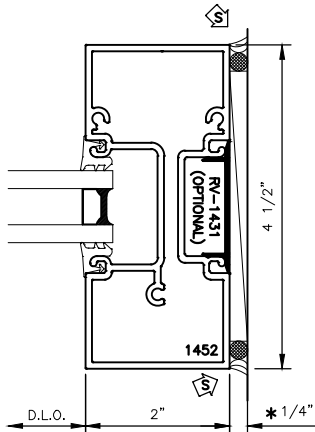


9

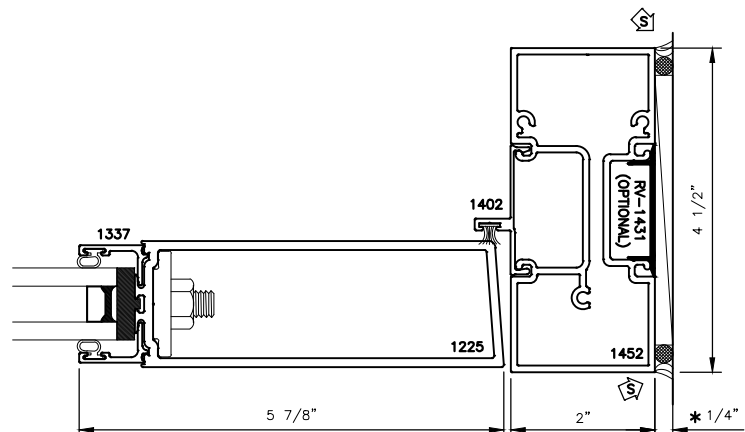

10

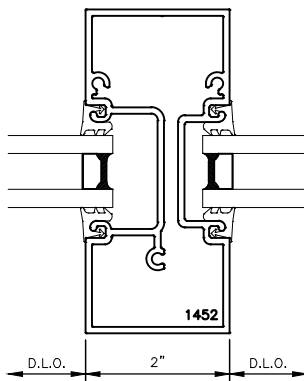


OPT.  
9.1

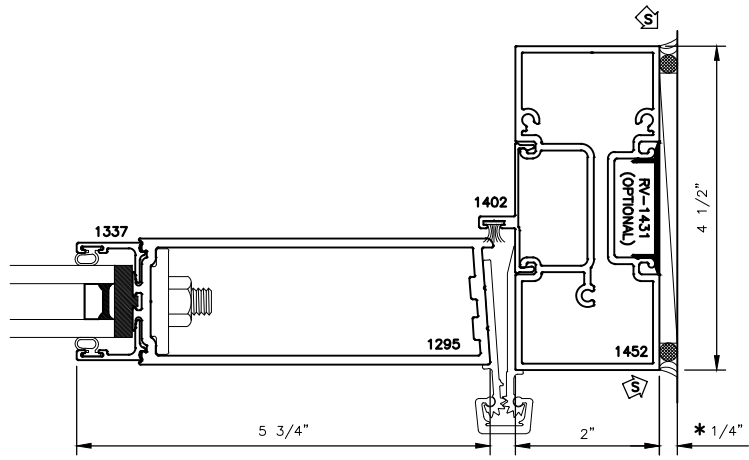


OPT.  
10.1

\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.  
INCREASE AS REQUIRED TO COMPLY WITH SEALANT  
MANUFACTURERS' INSTRUCTIONS

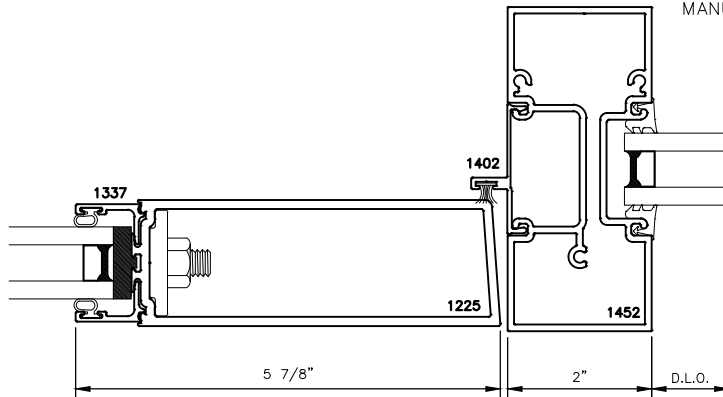


OPT.

10.2

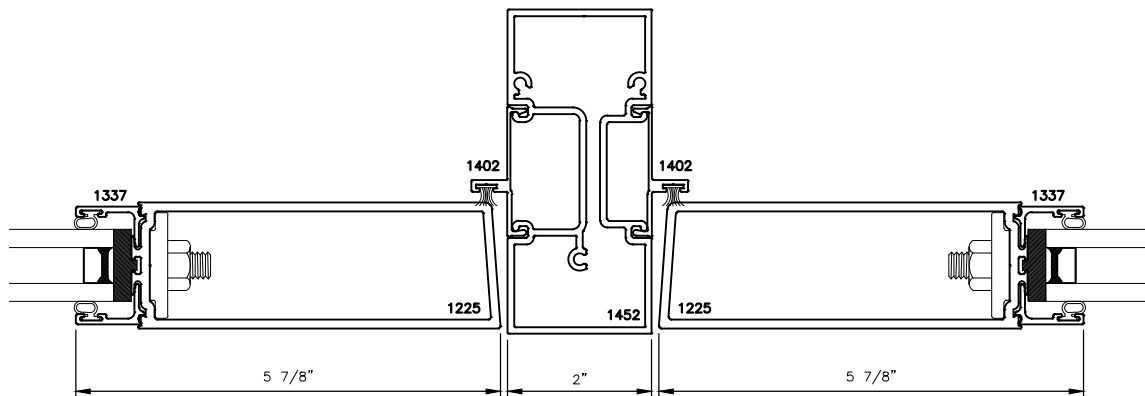

11

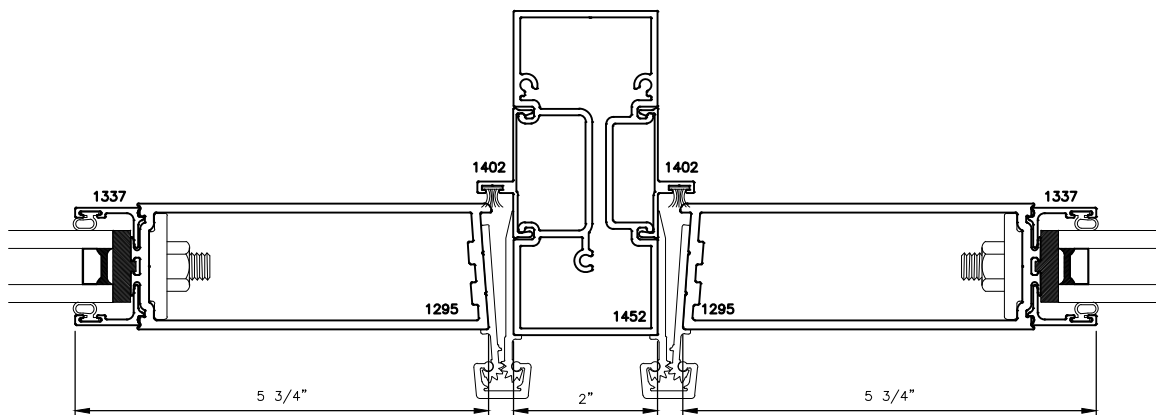

OPT.

11.1