



### 2450CG


# 2" X 4 1/2" THERMALLY BROKEN STOREFRONT DOOR FRAME WITH 150 SERIES (WIDE STILE) DOOR STANDARD DETAILS

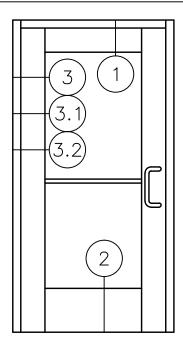


SINGLE DOOR WITHOUT TRANSOM STANDARD CONFIGURATION

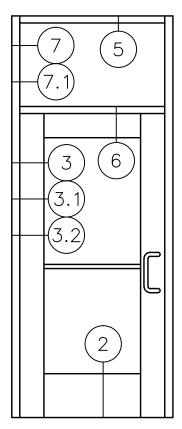

SINGLE DOOR WITH TRANSOM STANDARD CONFIGURATION




PAIR DOORS
WITHOUT TRANSOM
STANDARD CONFIGURATION

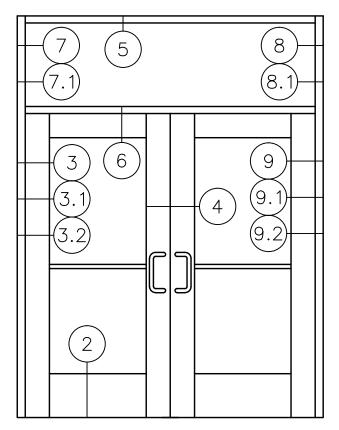

PAIR DOORS WITH TRANSOM STANDARD CONFIGURATION



\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION. INCREASE AS REQUIRED TO COMPLY WITH SEALANT MANUFACTURERS' INSTRUCTIONS

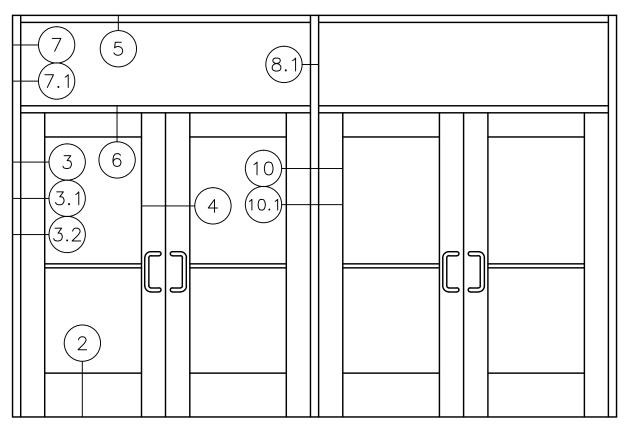

MULTIPLE PAIR DOORS MULLED TOGETHER

WITH TRANSOM STANDARD CONFIGURATION

4 1/2"


4 1/2"

2452

1221

1




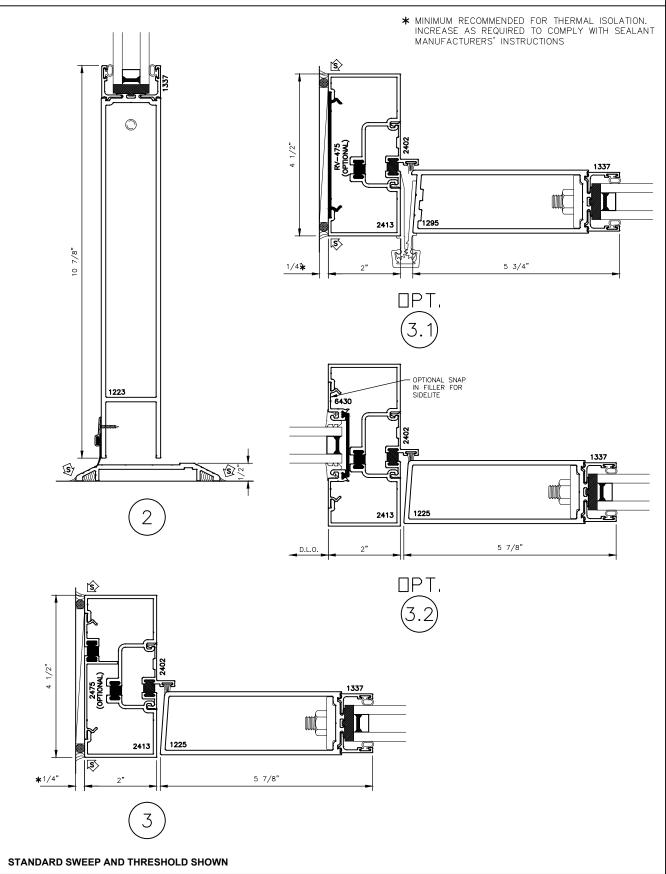



DOOR STANDARD DETAILS \* MINIMUM RECOMMENDED FOR THERMAL ISOLATION. INCREASE AS REQUIRED TO COMPLY WITH SEALANT MANUFACTURERS' INSTRUCTIONS 1236 1224 1229 5 7/8" 5 15/16" 4 1/2" <u>s</u> **(S)** RV-1431 (OPTIONAL) 2458 OPTIONAL RV-475 WITH OPTIONAL 2475 4" SHIM ANCHORS 2459 COLEGE ! জ D.L.O. 2413 **|**\$ D.L.O. **Fals** 2402 OPTIONAL SNAP IN FILLER FOR SIDELITE 6430 1221 6 জা 7/8" 2413 2" D.L.O. D.L.O.



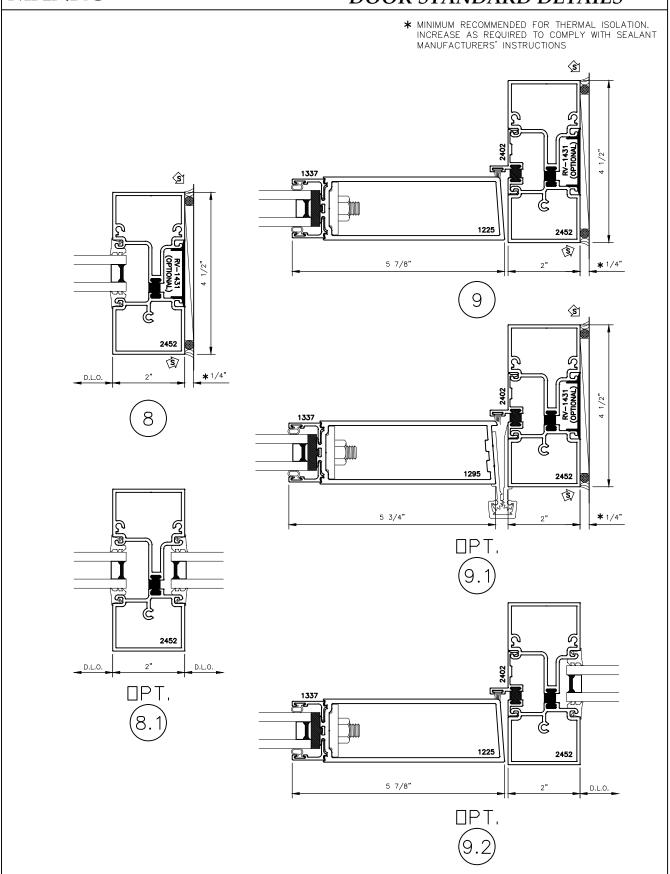



\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION. INCREASE AS REQUIRED TO COMPLY WITH SEALANT MANUFACTURERS' INSTRUCTIONS

