





2200


5 1/4"  
ALUMINUM SLIDING PATIO DOOR  
STANDARD DETAILS

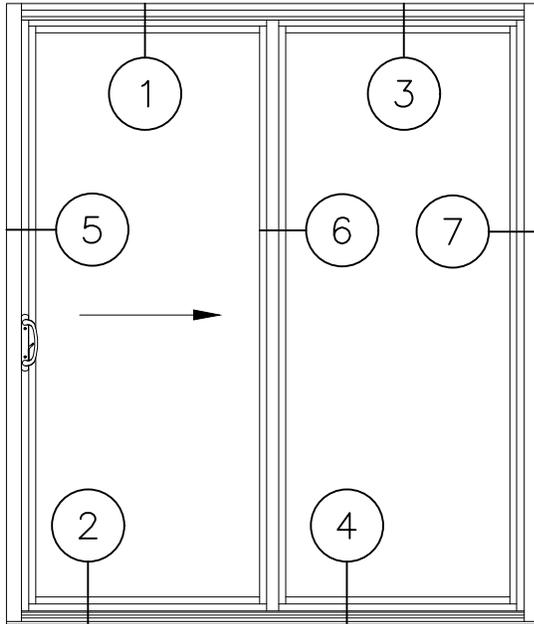

X-0  
STANDARD CONFIGURATION

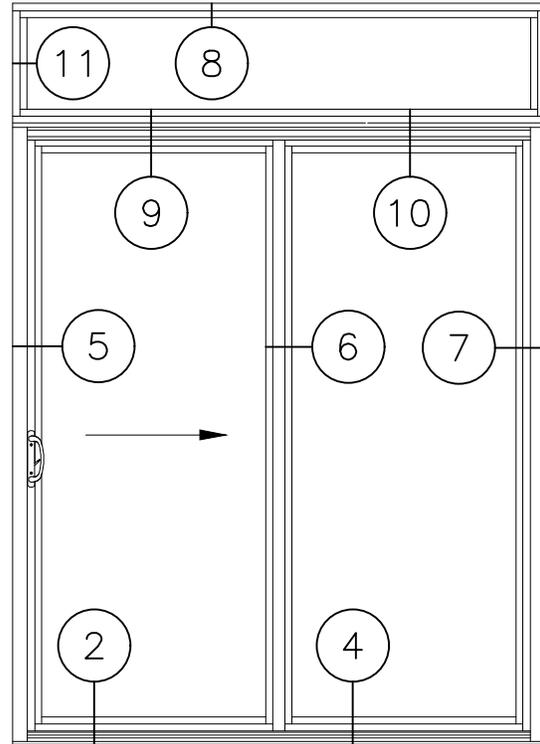

X-0 WITH TRANSOM  
STANDARD CONFIGURATION

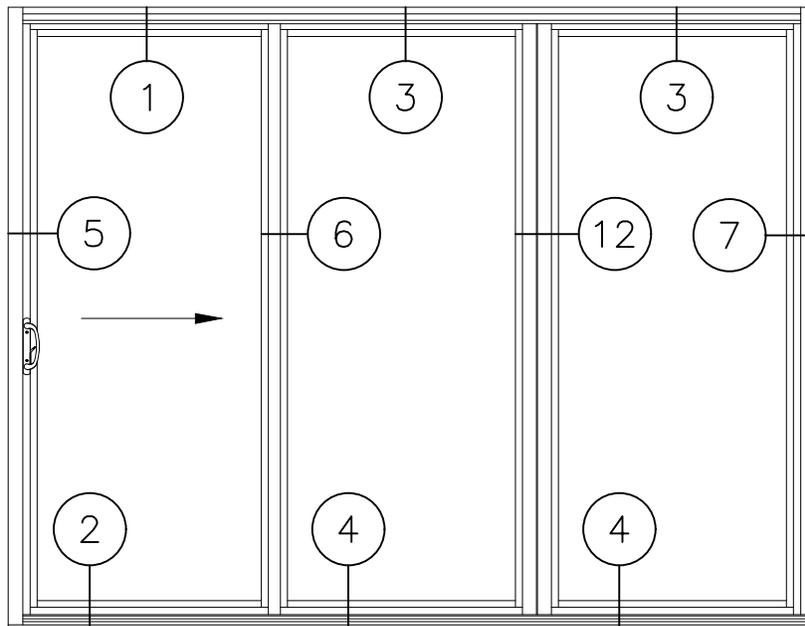


X-0-0  
STANDARD CONFIGURATION




2200

5 1/4"  
ALUMINUM SLIDING PATIO DOOR  
STANDARD DETAILS

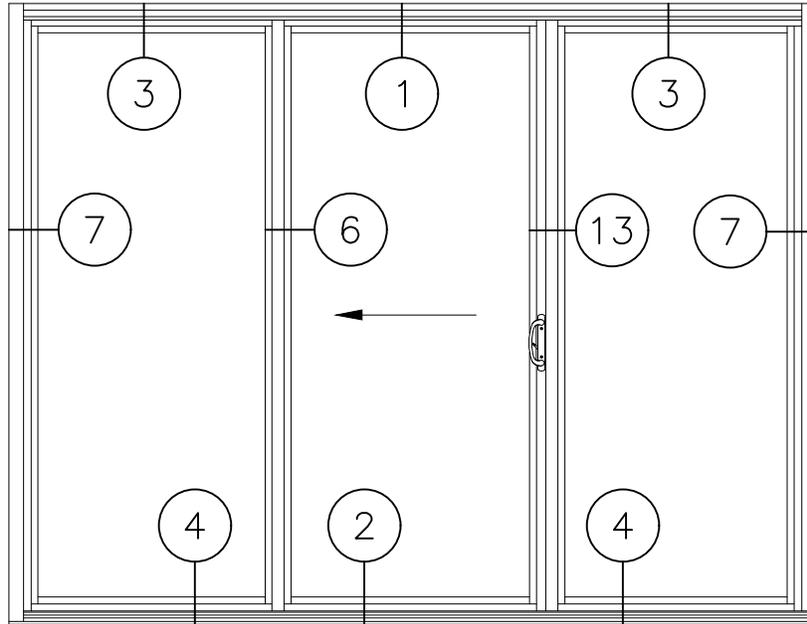

0-X-0  
STANDARD CONFIGURATION

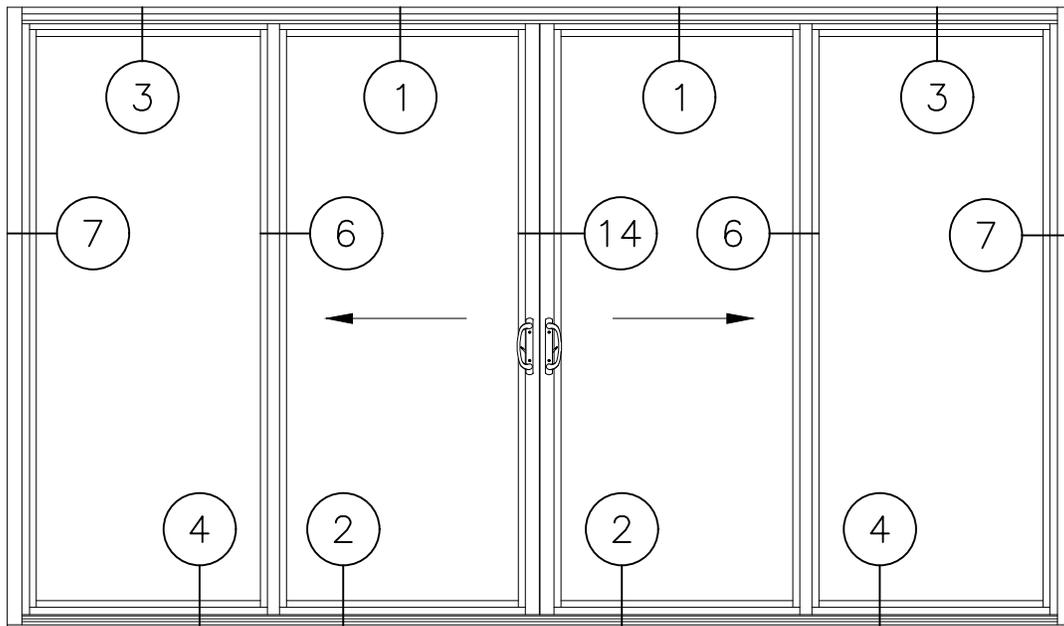





0-X-X-0  
STANDARD CONFIGURATION



2200

5 1/4"  
ALUMINUM SLIDING PATIO DOOR  
STANDARD DETAILS

\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.  
INCREASE AS REQUIRED TO COMPLY WITH SEALANT  
MANUFACTURERS' INSTRUCTIONS

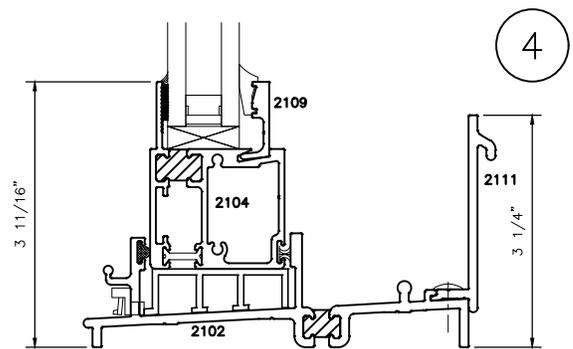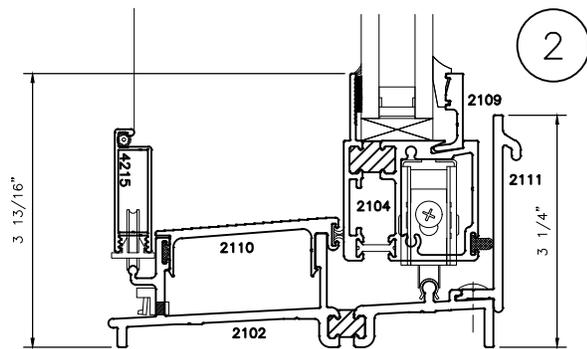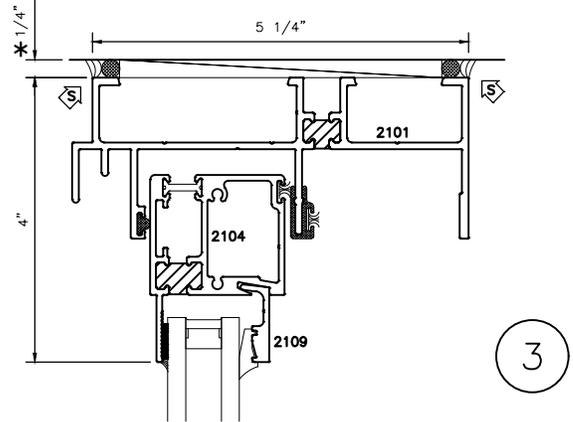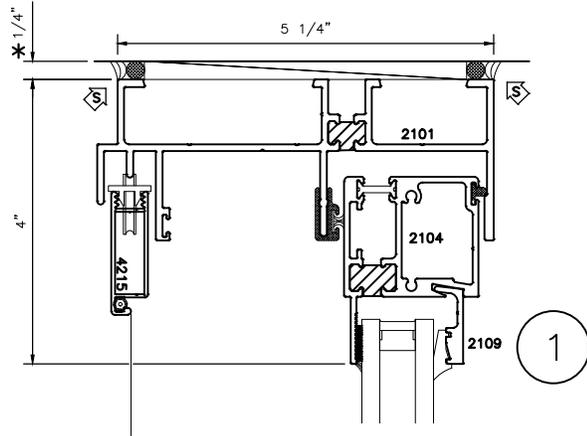

AW60 12 LBS







AW60 12 LBS



2200

5 1/4"  
ALUMINUM SLIDING PATIO DOOR  
STANDARD DETAILS

\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.  
INCREASE AS REQUIRED TO COMPLY WITH SEALANT  
MANUFACTURERS' INSTRUCTIONS

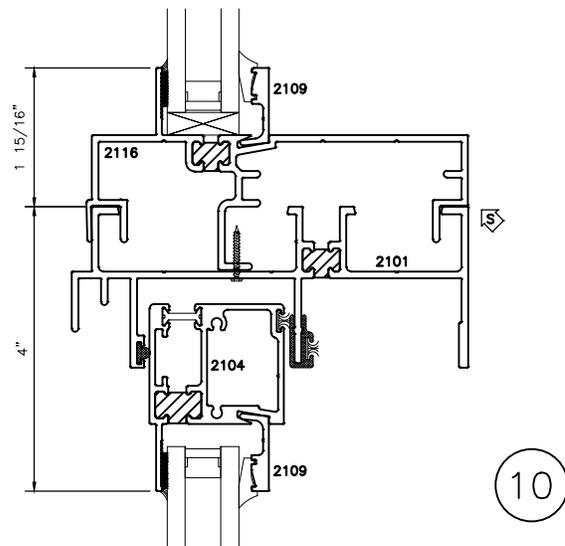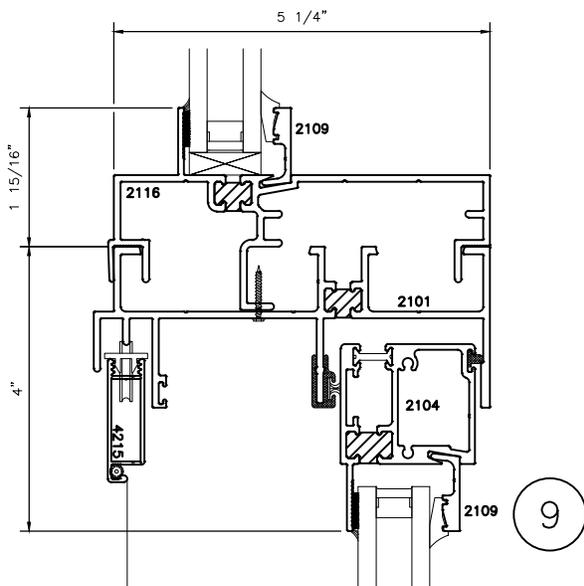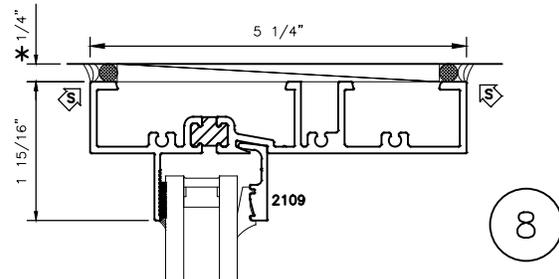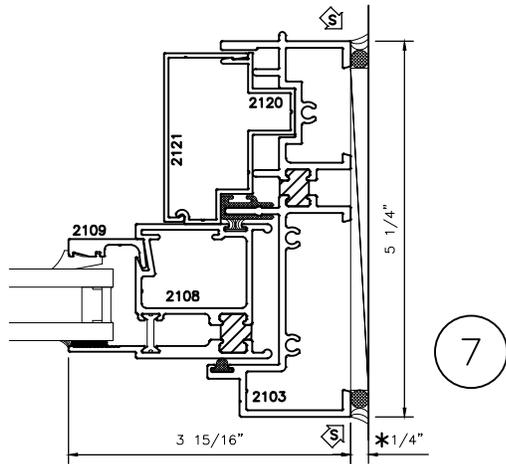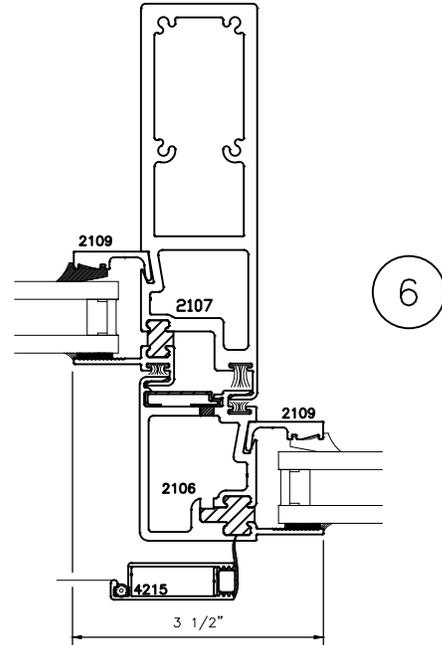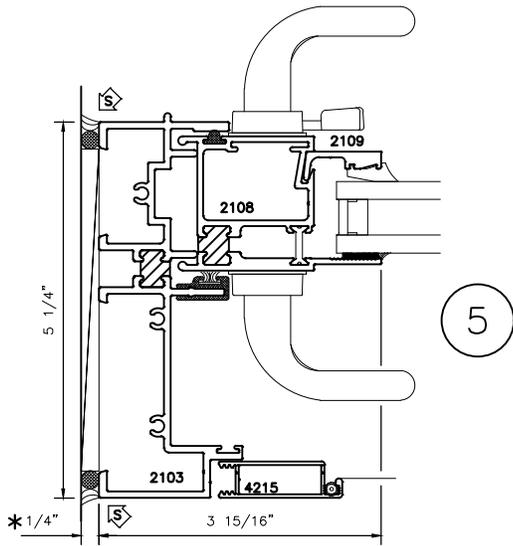



2200

5 1/4"  
ALUMINUM SLIDING PATIO DOOR  
STANDARD DETAILS

\* MINIMUM RECOMMENDED FOR THERMAL ISOLATION.  
INCREASE AS REQUIRED TO COMPLY WITH SEALANT  
MANUFACTURERS' INSTRUCTIONS

