


170i Series

Fiber Reinforced Polymer (FRP) Door

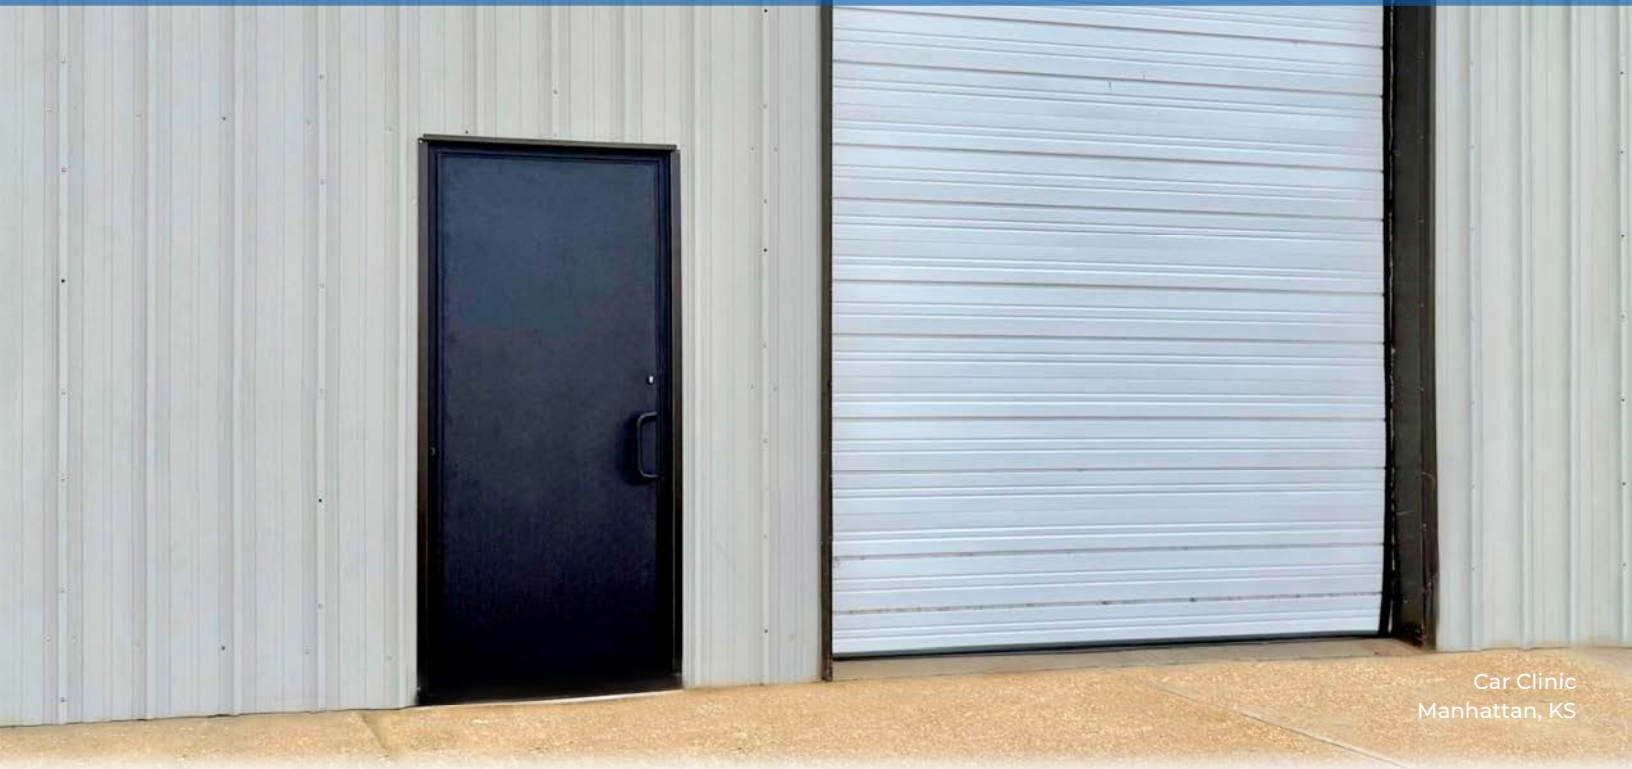

Car Clinic
Manhattan, KS

Manufactured with thermally broken stiles and rails, Manko's new **170i FRP** heavy duty FRP door has a sleek look and strength to last many years.

The highly durable FRP pebble embossed skin on the outer layer is reinforced by an 1/8" tempered hardboard backing that helps resist dents. The FRP door has an overall thickness of 2 3/8" and utilizes a 2" thick expanded polystyrene core to add insulation as well as overall impact strength. The **170i** series fiber reinforced polymer door can accommodate a wide range of hardware options.

Full panel (no glazing) or glass "lite kit" inserts provide a variety of arrangements, accepting 1/4" and 1" glazing. Multiple configurations make this door a choice for all entrance applications. These doors are easily installed in all of Manko's storefront and curtain wall systems.




Standard Lite Kit Configurations



170i-0



170i-1

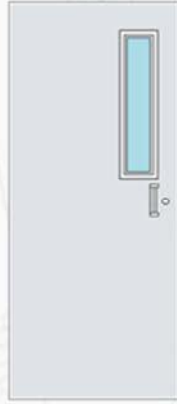

170i-2



170i-3



170i-4

170i FRP Door Components

Thermally Broken Perimeter Edge


Hardboard Substrate

Polystyrene Infill

.120" Thick Exterior Skin
Aluminum (160i) or FRP (170i)

2" x 5" Stiles and Rails

Polyamide Strut Thermal Breaks

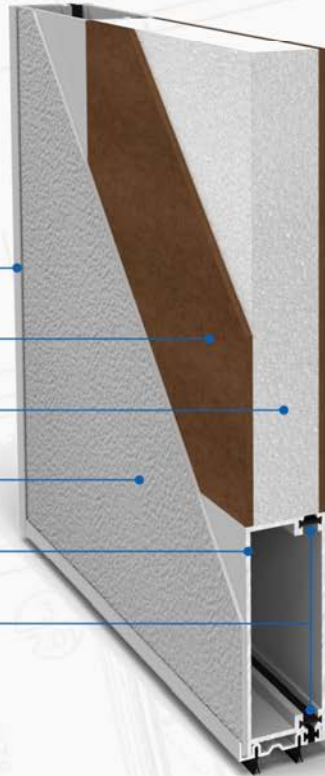

Visit www.mankowindowsystems.com
Or scan the QR code for more information on
Manko's 170i Series FRP Door